



 **SPEEDWAYS**
TYRES
...Keeps You Moving

Profile

SPEEDWAYS TYRES is a part of the well-known 'Speedways Group' of companies in India. Established in 1984, our presence today spans over 90 countries worldwide. We are leading manufacturer of Farm Radial, Agriculture Industrial, OTR, Two / Three Wheeler Tyres, Tubes & Flaps. We also specialize in Pre-Cured & Conventional Tread Rubber.

SPEEDWAYS located in the industrial town of Jalandhar, Punjab is having state-of-the-art manufacturing facility. The Tyres manufactured in this facility are supplied to major original equipment manufacturers (OEM's) in India, North America, Europe & Africa.

We have been awarded the "CAPEXIL Export Award" for a record eighth year in succession in recognition of our outstanding performance in exports. Built on the foundation of honesty, trust, lawful operation and scientific development, we strive to deliver maximum value to our customers & stakeholders. Over the years, we have established a distinct culture in the company through various HR policies. With an emphasis on TQM, continuous efforts are being undertaken at our R&D centre to improve product quality, manufacturing & production systems. Our target has always been to delight our customers with the best products and services.

TEAM

We are young, dynamic and motivated professionals who are passionate and committed to achieve better results for our customers. We employ a customized engagement process to understand and meet the customer's requirement. Our team members interact at all levels to forge a strong relationship to sustain the success achieved.

SKILL & EXPERIENCE

Our team at **SPEEDWAYS TYRES** specializes in handling & solving complex problems that includes long term strategic planning, business process design and setting up a control framework. We are proud to have a legacy of succeeding in adverse and testing business conditions.

KEY GROWTH DRIVERS:

- Technology
- Cost of Production & Manufacturing efficiency
- Receptive to customer feedback

WHAT WE BELIEVE IN?

- Thoughts which start from the customer
- Service, Quality & Customer Satisfaction
- Process excellence
- Relationship with all stakeholders
- Application development
- On-time delivery

Our endeavour is to work aggressively, challenge traditional mind-set so as to provoke our team to be innovate in their thoughts, actions & delivery.

COLLABORATIVE STRATEGY

- Synergy with the customer at:
 - Product level
 - Market level
 - Organizational level



Index

AGRICULTURAL TYRES

Tractor Radial Tyres - 70, 80 & 85 Series	01
Row Crop Radial Tyres - 90 & 95 Series	02
Bias Tractor Rear Tyres	03
Bias Tractor Front Tyres	05
Irrigation Drive R-1 Tyres	06
Bias Row Crop Farming Tyres	07
Farming & Highway Service Implement Tyres	08
Drive Wheel Tyres	08
Harvester Tyres	08
Agricultural Implement Tyres	09
All Terrain Traction Tyres	11
Flotation Implement Tyres	12
Forestry Tyres	13
Agriculture Trailer & Vintage Vehicle Tyres	17
Mountain Tyres	18
Lawn & Garden Tyres	19
Golf Cart Tyres	19
Sports Ground Tyres	19

INDUSTRIAL TYRES

Skid Steer Tyres	21
Drive Wheel (R-3) Tyres	23
Excavator Tyres	23
Industrial Tyres	23
Industrial Tractor Tyres	24
Earthmover Tyres	25
Industrial Forklift Tyres	25
Multi Purpose Truck (MPT)	26
Compactor Tyres	27
Grader Tyres	27

TRUCK & LIGHT TRUCK TYRES

29

ELECTRIC VEHICLE TYRES

30

MILITARY JEEP 4X4 TYRES

31

THREE WHEELER TYRES

31

TWO WHEELER TYRES

32

BUTYL TUBES & FLAPS

33

CERTIFICATIONS



ISO 9001:2015



REACH



BIS



E-MARK



D.O.T

AGRICULTURAL TYRES





APPLICATION
TRACTOR
4X4



TRACTOR RADIAL TYRES

70, 80 & 85 SERIES

- Radial tyre with balanced characteristics for a wide range of applications both in the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SR-888



SR-777

SIZE	PATTERN	RIM WIDTH		TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	mmés	kg	lbs	kg	lbs	bar	psi		kmph	mph
280/85R-24 11.2R-24 125 A8/B	SR-888	W 10	W 9	TL	282	11.1	1087	42.8	508	20.0	3429	135.0	41	51	1215	2673	1215	2673	1.6	23	115	B/50 kmph	B/30 mph
340/85R-24 13.6R-24 125 A8/B	SR-888	W 12	W 11	TL	343	13.5	1188	46.8	533	21.0	3531	139.0	44	55	1650	3630	1650	3630	1.6	23	125	B/50 kmph	B/30 mph
380/85R-24 14.9R-24 131 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	44	55	1955	4301	1955	4301	1.6	23	131	B/50 kmph	B/30 mph
320/85R-28 12.4R-28 124 A8/B	SR-888	W 11	W 9 W 10	TL	320	12.6	1255	49.4	559	22.0	3734	147.0	42	53	1600	3520	1600	3520	1.6	23	124	B/50 kmph	B/30 mph
340/85R-28 13.6R-28 127 A8/B	SR-888	W 12	W 11	TL	353	13.9	1288	50.7	584	23.0	3835	151.0	44	55	1755	3861	1755	3861	1.6	23	127	B/50 kmph	B/30 mph
380/85R-28 14.9R-28 133 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1356	53.4	610	24.0	4013	158.0	45	56	2060	4532	2060	4532	1.6	23	133	B/50 kmph	B/30 mph
420/70R-28 133 A8/B	SR-777	W 13	W 12 W 14	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	44	55	2064	4540	2064	4540	1.6	23	133	B/50 kmph	B/30 mph
420/85R-28 16.9R-28 139 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	50	62	2430	5346	2430	5346	1.6	23	139	B/50 kmph	B/30 mph
380/85R-30 14.9R-30 135 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	46	57	2180	4796	2180	4796	1.6	23	135	B/50 kmph	B/30 mph
420/85R-30 16.9R-30 140 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	49	61	2500	5500	2500	5500	1.6	23	140	B/50 kmph	B/30 mph
380/85R-34 14.9R-34 137 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1808	71.2	686	27.0	4470	176.0	45	56	2300	5060	2300	5060	1.6	23	137	B/50 kmph	B/30 mph
420/85R-34 16.9R-34 142 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	49	61	2650	5830	2650	5830	1.6	23	142	B/50 kmph	B/30 mph
460/85R-34 18.4R-34 147 A8/B	SR-888	W 16	W 14 W 15	TL	475	18.7	1646	64.8	737	29.0	4851	191.0	52	65	3082	6780	3082	6780	1.6	23	142	B/50 kmph	B/30 mph
420/85R-38 16.9R-38 144 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1679	66.1	762	30.0	5004	197.0	51	64	2800	6160	2800	6160	1.6	23	144	B/50 kmph	B/30 mph
460/85R-38 18.4R-38 149 A8/B	SR-888	W 16	W 14 W 15	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	54	67	3250	7150	3250	7150	1.6	23	149	B/50 kmph	B/30 mph
520/85R-38 20.8R-38 155 A8/B	SR-888	DW 16	DW 18	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	58	72	3875	8525	3875	8525	1.6	23	155	B/50 kmph	B/30 mph
480/80R-42 18.4R-42 151 A8/B	SR-888	W 16	DW 16	TL	480	18.9	1836	72.3	762	30.0	5461	215.0	54	68	3450	7590	3450	7590	1.6	23	151	B/50 kmph	B/30 mph
520/85R-42 20.8R-42 155 A8/B	SR-888	W 16	DW 16	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	58	72	4136	9100	4136	9100	1.6	23	151	B/50 kmph	B/30 mph
480/80R-46 18.4R-46 158 A8/B	SR-888	W 16	DW 16	TL	480	18.9	1933	76.1	889	35.0	5791	228.0	54	68	4259	9370	4259	9370	2.4	34	158	B/50 kmph	B/30 mph
340/85R-48 13.6R-48 152 A8/B	SR-888	W 12	W 11	TL	353	13.9	1798	70.8	838	33.0	5385	212.0	37	46	3557	7825	3557	7825	4.1	58	152	B/50 kmph	B/30 mph



APPLICATION
TRACTOR
4X4



ROW CROP RADIAL TYRES

90 & 95 SERIES

- Round shoulders minimize influence on the crop roots.
- Optimum lug shape & angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.



RC-999

SIZE	PATTERN	RIM WIDTH		TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	oznds	mm	oznds	25 KMPH MAX LOAD		30 KMPH MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
210/95R-32 8.3R-32 120 A8/B	RC-999	W 8	W 7	TL	214	8.4	1213	47.8	559	22.0	3658	144.0	41	51	1400	3080	1400	3080	2.5	36	120	B/50 kmph	B/30 mph
230/95R-32 9.5R-32 125 A8/B	RC-999	W 8	W 7	TL	228	9.0	1251	49.3	584	23.0	3759	148.0	44	55	1800	3960	1800	3960	4.1	58	128	B/50 kmph	B/30 mph
270/95R-32 11.2R-32 136 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1327	52.2	609	24.0	5004	197.0	44	55	2240	4928	2240	4928	4.1	58	136	B/50 kmph	B/30 mph
230/95R-36 9.5R-36 124 A8/B	RC-999	W 8	W 7	TL	228	9.0	1352	53.2	609	24.0	4064	160.0	42	53	1900	4180	1900	4180	4.1	58	130	B/50 kmph	B/30 mph
270/95R-36 11.2R-36 140 A8/B	UNDER DEVELOPMENT																						
270/95R-38 11.2R-38 140 A8/B	RC-999	W 8	W 9 W 10	TL	264	10.3	1479	58.2	686	27.0	4445	175.0	45	56	2505	5511	2505	5511	4.1	58	140	B/50 kmph	B/30 mph
230/95R-44 9.5 R-44 134 A8/B	RC-999	W 8	W 7	TL	228	9.0	1556	61.3	737	29.0	4699	185.0	44	55	2120	4664	2120	4664	4.1	58	134	B/50 kmph	B/30 mph
270/95R-44 11.2R-44 134 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1632	64.3	762	30.0	4902	193.0	50	62	2650	5830	2650	5830	4.1	58	142	B/50 kmph	B/30 mph
300/95R-46 12.4R-46 148 A8/B	RC-999	W 8	W 9 W 11	TL	305	12.0	1737	68.3	813	32.0	5207	205.0	46	57	3157	6945	3157	6945	4.1	58	148	B/50 kmph	B/30 mph
380/95R-46 14.9R-46 148 A8/B	UNDER DEVELOPMENT																						
230/95R-48 9.5R-48 136 A8/B	RC-999	W 8	W 7	TL	228	9.0	1657	65.2	787	30.1	4978	196.0	45	56	2240	4928	2240	4928	4.1	58	136	B/50 kmph	B/30 mph
270/95R-48 11.2R-48 144 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1733	68.2	812	32.0	5257	207.0	49	61	2800	6160	2800	6160	4.1	58	144	B/50 kmph	B/30 mph
300/95R-52 11.2R-52 144 A8/B	RC-999	W 10	W 9 W 11	TL	305	12	1892	75.0	889	35.0	5664	223.0	52	65	3457	7605	3457	7605	4.1	58	151	B/50 kmph	B/30 mph



BIAS TRACTOR REAR TYRES

- Deep Tread and excellent tread wear and durability.
- Designed to deliver power to the ground.
- Design offers maximum cleaning and sidehill slip resistance.



GRIPKING



GRIPKING HD



PK-319



GK-111



FIELDKING



KRISHIKING



POWERLUG



GRIPKING PLUS



TR-21



BIAS TRACTOR FRONT TYRES

- Penetrates deep into soil for maximum steering control & minimal lateral side-slip because of its high center rib.
- Best for handling heavy loads on hard-packed surfaces.
- Offers excellent load distribution and flotation.



F-2



SW-101



SW-201



SW-99



TF-2000



SW-200



DUAL RIB PLANTER

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
3.50-6	F-2	4	2.5	TT	99	3.9	343	13.5	214	8.4	1341	52.8	10	13	165	363	2.7	38	45	A8/40 kmph	A8/25 mph
3.50-8	F-2	4	2.5	TT	101	4.0	371	14.6	218	8.6	1390	54.7	9	11	185	407	2.7	38	49	A8/40 kmph	A8/25 mph
4.00-8	F-2	4	3.0	TT	112	4.4	430	16.9	224	8.8	1430	56.3	9	11	225	495	2.8	40	56	A8/40 kmph	A8/25 mph
4.00-12	F-2	4	3.0	TT	112	4.4	530	20.8	254	10.0	1626	64.0	10	13	300	660	2.8	27	66	A8/40 kmph	A8/25 mph
4.00-15	F-2	4	3.0	TT	112	4.4	610	24.0	295	11.6	1854	73.0	8	10	290	638	2.8	27	65	A8/40 kmph	A8/25 mph
5.00-15	F-2	6	4.0	TT	140	5.5	655	25.8	305	12.0	1956	77.0	12	15	475	1045	4.8	54	90	A8/40 kmph	A8/25 mph
	SW-201	4	3.0	TT	140	5.5	655	25.8	305	12.0	1956	77.0	14	18	475	1045	3.8	54	82	A8/40 kmph	A8/25 mph
	SW-99	6	4.0	TT	140	5.5	655	25.8	305	12.0	1956	77.0	14	18	475	1045	3.8	54	82	A8/40 kmph	A8/25 mph
4.00-16	F-2	4	3.0	TT	112	4.4	640	25.2	305	12.0	1956	77.0	10	13	325	715	3.5	50	69	A8/40 kmph	A8/25 mph
	SW-201	8	3.0	TT	112	4.4	640	25.2	305	12.0	1956	77.0	10	13	325	715	3.5	50	69	A8/40 kmph	A8/25 mph
4.50-16	F-2	6	3.0	TT	122	4.8	665	26.2	305	12.0	1956	77.0	10	13	365	803	3.3	47	73	A8/40 kmph	A8/25 mph
	SW-201	6	3.0	TT	122	4.8	665	26.2	305	12.0	1956	77.0	10	13	365	803	3.3	47	73	A8/40 kmph	A8/25 mph
5.00-16	F-2	6	4.0	TT	140	5.5	680	26.8	330	13.0	2032	80.0	10	13	400	880	4.2	60	76	A8/40 kmph	A8/25 mph
	SW-201	6	4.0	TT	140	5.5	680	26.8	330	13.0	2032	80.0	10	13	400	880	4.2	60	76	A8/40 kmph	A8/25 mph
5.50-16	F-2	6	4.0	TT	150	5.9	710	27.9	330	13.0	2083	82.0	12	15	500	1100	3.7	54	84	A8/40 kmph	A8/25 mph
	SW-201	6	4.0	TT	150	5.9	710	27.9	330	13.0	2083	82.0	12	15	500	1100	3.7	54	84	A8/40 kmph	A8/25 mph
	SW-99	6	4.0	TT	150	5.9	710	27.9	330	13.0	2083	82.0	12	15	500	1100	3.8	54	78	A8/40 kmph	A8/25 mph
6.00-16	F-2	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.6	65	94	A8/40 kmph	A8/25 mph
	SW-99	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.6	65	94	A8/40 kmph	A8/25 mph
	SW-101	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.6	65	94	A8/40 kmph	A8/25 mph
	SW-201	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.6	65	94	A8/40 kmph	A8/25 mph
	TF-2000	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	13	16	670	1474	4.6	65	94	A8/40 kmph	A8/25 mph
6.50-16	F-2	8	4.5	TT	175	6.8	760	29.9	356	14.0	2286	90.0	13	16	750	1650	4.3	61	98	A8/40 kmph	A8/25 mph
	SW-101	8	4.5	TT	175	6.8	760	29.9	356	14.0	2286	90.0	13	16	750	1650	4.3	61	98	A8/40 kmph	A8/25 mph
	SW-201	8	4.5	TT	175	6.8	760	29.9	356	14.0	2286	90.0	13	16	750	1650	4.3	61	98	A8/40 kmph	A8/25 mph
7.50-16	F-2	8	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	14	18	875	1925	3.8	54	103	A8/40 kmph	A8/25 mph
	SW-101	8	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	14	18	875	1925	3.8	54	103	A8/40 kmph	A8/25 mph
	SW-201	8	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	14	18	875	1925	3.8	54	103	A8/40 kmph	A8/25 mph
	SW-201	12	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	14	18	1350	2970	4.0	57	119	A8/40 kmph	A8/25 mph
9.00-16	F-2	10	7.0	TT/TL	234	9.2	854	33.6	406	16.0	2540	100.0	15	19	1250	2750	3.9	55	116	A8/40 kmph	A8/25 mph
10.00-16	F-2	10	7.0	TT/TL	275	10.8	900	35.4	406	16.0	2692	106.0	18	23	1360	2992	2.9	41	119	A8/40 kmph	A8/25 mph
11.00-16	F-2	12	10	TT/TL	320	12.6	970	38.1	457	18.0	2896	114.0	23	29	1600	3520	2.5	48	124	A8/40 kmph	A8/25 mph
6.00-18	SW-201	8	4.5	TT	165	6.5	795	31.3	457	18.0	2340	92.1	11	14	710	1562	3.3	47	96	A8/40 kmph	A8/25 mph
7.50-18	F-2	8	5.5	TT	204	8.0	867	34.2	406	16.0	2565	101.0	14	18	950	2090	3.8	54	106	A8/40 kmph	A8/25 mph



APPLICATION
TRACTOR
4X4



BIAS ROW CROP

FARMING TYRES

- Excellent traction and directional stability.
- Deep lugs, low slip and optimized rubber compounds help reduce wear to give exceptionally long tire life.



GRIPKING R-1



GRIP QUEEN

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
4.50-19	GRIPKING R-1	6	3.0	TT	122	4.8	736	29.0	343	13.5	2146	84.5	15	19	487	1071	4.5	64	83	A8/40 kmph	A8/25 mph
4.00-21	GRIPKING R-1	6	3.0	TT	115	4.5	762	30.0	350	13.8	2247	88.5	6	7	180	396	1.8	25	48	A8/40 kmph	A8/25 mph
4.00-21	GRIP QUEEN	6	3.0	TT	115	4.5	762	30.0	350	13.8	2247	88.5	6	7	180	396	1.8	25	48	A8/40 kmph	A8/25 mph
5.00-21	GRIPKING R-1	6	4.0	TT	140	5.5	823	32.4	360	14.2	2310	91.0	10	13	435	957	2.7	38	79	A8/40 kmph	A8/25 mph
8.3-28	GRIPKING R-1	8	7.0	TT	211	8.3	1095	43.1	533	21.0	3251	128.0	27	34	1000	2200	2.4	34	108	A8/40 kmph	A8/25 mph
9.5-28	GRIPKING R-1	8	8.0	TT	241	9.5	1156	45.5	543	21.4	3350	132.0	28	35	1180	2596	2.8	40	114	A8/40 kmph	A8/25 mph
4.00-30	GRIPKING R-1	4	3.0	TT	116	4.5	995	39.1	457	18.0	2938	115.7	12	15	350	770	1.3	18	72	A8/40 kmph	A8/25 mph
7.2-30	GRIPKING R-1	6	6.0	TT	183	7.2	1095	43.1	533	21.0	3225	126.9	27	34	690	1518	2.3	33	95	A8/40 kmph	A8/25 mph
9.5-30	GRIPKING R-1	8	8.0	TT	241	9.5	1200	47.2	559	22.0	3531	139.0	29	36	1215	2673	2.8	40	115	A8/40 kmph	A8/25 mph
8.3-32	GRIPKING R-1	8	7.0	TT	211	8.3	1193	47.0	584	23.0	3581	141.0	30	38	1090	2398	3.2	45	111	A8/40 kmph	A8/25 mph
9.5-32	GRIPKING R-1	8	8.0	TT	241	9.5	1255	49.4	584	23.0	3683	145.0	30	38	1060	2332	2.1	50	119	A8/40 kmph	A8/25 mph
4.00-36	GRIP QUEEN	6	3.0	TT	120	4.7	1140	44.9	524	20.6	3364	132.5	6	7	375	825	2.4	34	74	A8/40 kmph	A8/25 mph
4.00-36	GRIPKING R-1	6	3.0	TT	120	4.7	1140	44.9	524	20.6	3364	132.5	12	15	375	825	2.4	34	74	A8/40 kmph	A8/25 mph
4.50-36	GRIPKING R-1	6	3.0	TT	135	5.3	1150	45.2	530	20.9	3402	134.0	12	15	450	990	2.5	35	80	A8/40 kmph	A8/25 mph
5.00-36	GRIPKING R-1	6	3.0	TT	145	5.7	1175	46.2	540	21.3	3456	136.0	12	15	460	1012	2.5	35	81	A8/40 kmph	A8/25 mph
7.2-36	GRIPKING R-1	8	6.0	TT	183	7.2	1255	49.4	610	24.0	3810	150.0	30	38	1005	2211	3.7	53	108	A8/40 kmph	A8/25 mph
8.3-36	GRIPKING R-1	8	7.0	TT	211	8.3	1293	50.9	610	24.0	3810	150.0	28	38	1150	2530	3.2	45	113	A8/40 kmph	A8/25 mph
9.5-36	GRIPKING R-1	8	8.0	TT	241	9.5	1359	53.5	623	24.5	4000	157.5	31	39	1500	3300	3.6	51	112	A8/40 kmph	A8/25 mph
12.4-36	GRIPKING R-1	8	11.0	TT	315	12.4	1465	57.7	686	27.0	4318	170.0	28	35	1750	3850	2.3	33	127	A8/40 kmph	A8/25 mph
8.3-38	GRIPKING R-1	8	7.0	TT	211	8.3	1350	53.1	621	24.5	3986	157.0	31	39	1250	2750	3.5	50	116	A8/40 kmph	A8/25 mph
9.5-38	GRIPKING R-1	8	8.0	TT	241	9.5	1405	55.3	646	25.5	4147	163.3	31	39	1800	3960	3.0	43	128	A8/40 kmph	A8/25 mph
11.2-38	GRIPKING R-1	6	10.0	TT	284	11.2	1465	57.7	693	27.2	4343	171.0	30	38	1295	2850	1.8	26	117	A8/40 kmph	A8/25 mph
12.4-38	GRIPKING R-1	8	11.0	TT	315	12.4	1511	59.4	716	28.2	4496	177.0	32	40	1750	3850	2.7	38	127	A8/40 kmph	A8/25 mph
	GRIPKING R-1	12	11.0	TT	315	12.4	1511	59.4	716	28.2	4496	177.0	32	40	1800	3960	2.8	39	128	A8/40 kmph	A8/25 mph



APPLICATION
FARM & CONST.
4X4



FARM & HIGHWAY SERVICE (D.O.T APPROVED)

IMPLEMENT TYRES



- Offers D.O.T. compliance for approved operation at highway speeds.
- Noted for its great handling and towing characteristics.

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
9.5L-15FI	FHS	12	7.0	TL	249	9.8	767	30.2	343	13.5	2260	89	9	11	1215	2673	4.2	60	115	3/100 kmph	3/60 mph
11-15LT	FHS	12	8.0	TL	266	10.5	790	31.1	353	13.9	2336	92	10	13	1800	3960	6.3	90	128	3/100 kmph	3/60 mph
12.5-15LT	FHS	12	10.0	TL	325	12.8	838	33.0	368	14.5	2464	97	10	13	2120	4664	6.3	90	134	3/100 kmph	3/60 mph



APPLICATION
TRACTOR

DRIVE WHEEL TYRES

R-2



- Extra deep tread specially designed to get excellent traction on wet and sticky soil with excellent self cleaning properties, preventing mud clogging between the lugs.
- Sidewall rubber preventing weather cracking.
- Tough tread compound to resist fast wear.

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
18.4-30	TR-2	8	16.0	TT	465	18.3	1580	62.2	711	28.0	4724	186.0	80	100	2184	4805	1.4	20	135	A8/40 kmph	A8/25 mph
18.4-34	TR-2	8	16.0	TT	465	18.3	1682	66.2	762	30.0	5029	198.0	80	100	2304	5069	1.4	20	137	A8/40 kmph	A8/25 mph
	TR-2	12	16.0	TT	465	18.3	1682	66.2	762	30.0	5029	198.0	80	100	3090	6798	2.3	33	147	A8/40 kmph	A8/25 mph



APPLICATION
HARVESTING
MACHINES

HARVESTER TYRES



- Suitable for all kinds of Harvesting Machines
- Design to deliver power to the ground
- Extra deep tread
- Low soil compaction and excellent traction in the field

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
24.5-32	PK-319 HD	12	21	TL	622	24.5	1806	71.1	808	31.8	5340	210.4	42	53	4000	8800	1.7	24	156	A8/40 kmph	A8/25 mph
24.5-32	PK-319 HD	14	21	TL	622	24.5	1806	71.1	808	31.8	5340	210.4	42	53	4386	9650	2.0	28	159	A8/40 kmph	A8/25 mph
30.5L-32	PK-319 HD	16	27	TL	770	30.3	1864	73.4	831	32.7	5519	217.3	48	60	5000	11000	1.8	26	164	A8/40 kmph	A8/25 mph
30.5L-32	PK-319 HD	18	27	TL	770	30.3	1864	73.4	831	32.7	5519	217.3	48	60	5459	12010	2.1	30	167	A8/40 kmph	A8/25 mph

tolerances: DR: ± 2.5% - SR: ± 1.5% - RC: ± 2.5%



APPLICATION
AGRI. MACHINERY



AGRICULTURAL IMPLEMENT TYRES

- Low section Implement tyres offering high load capacity with minimum soil compaction.
- Ideal tyres for modern farming, suitable for both on and off-the-road applications.



RIB-777



PK-303



TRENCHER



I-1 FARM SERVICE



PK-305



PK-307

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
7.00-12	PK-303	6	4.25	TL	185	7.3	665	26.2	305	12.0	1956	77.0	8	10	750	1650	3.4	48	98	A8/40 kmph	A8/25 mph
300/65-12	RIB-777	8	9.0	TL	305	12.0	685	27.0	305	12.0	2007	79.0	8	10	1500	3300	3.6	51	122	A8/40 kmph	A8/25 mph
10.0/80-12	PK-303	8	9.0	TL	264	10.4	710	28.0	305	12.0	2083	82.0	8	9	1250	2750	4.2	60	116	A8/40 kmph	A8/25 mph
	PK-303	10	9.0	TL	264	10.4	710	28.0	305	12.0	2083	82.0	8	9	1420	3124	5.4	77	121	A8/40 kmph	A8/25 mph
23x10.50-12	TRENCHER	6	8.5	TL	264	10.3	575	22.6	262	10.3	1697	66.8	15	19	775	1705	2.3	33	99	A3/15 kmph	A3/9 mph
26x12.00-12	TRENCHER	8	10.5	TL	305	12.0	660	26.0	283	11.1	1856	73.0	17	21	1285	2827	3.0	43	117	A3/15 kmph	A3/9 mph
	TRENCHER	12	10.5	TL	305	12.0	660	26.0	283	11.1	1856	73.0	17	21	1600	3520	4.5	64	124	A3/15 kmph	A3/9 mph
9.5L-14	I-1 FARM SERVICE	8	7.0	TL	240	9.4	735	28.9	330	13.0	2159	85.0	6	7	1090	2398	3.0	43	111	D/65 kmph	D/40 mph
11L-14	I-1 FARM SERVICE	8	8.0	TL	274	10.8	746	29.4	333	13.1	2209	87.0	7	7	1125	2475	2.4	36	112	D/65 kmph	D/40 mph
200/60-14.5	RIB-777	10	6.8	TL	210	8.3	610	24.0	279	11.0	1778	70.0	9	11	1030	2266	6.9	98	109	A8/40 kmph	A8/25 mph
	RIB-777	14	6.8	TL	210	8.3	610	24.0	279	11.0	1778	70.0	9	11	1150	2530	7.1	99	113	A8/40 kmph	A8/25 mph
250/65-14.5	RIB-777	12	6.8	TL	260	10.2	694	27.3	279	11.0	1778	70.0	9	11	1550	3410	6.5	92	123	A8/40 kmph	A8/25 mph
5.90-15	I-1 FARM SERVICE	4	4.5	TL	152	6.0	657	25.9	295	11.6	1955	77.0	5	6	522	1150	2.5	36	86	D/65 kmph	D/40 mph
6.70-15	I-1 FARM SERVICE	6	4.5	TL	167	6.6	703	27.7	330	13.0	2082	82.0	5	6	730	1606	3.0	43	97	D/65 kmph	D/40 mph



APPLICATION
TRACTOR
4X4



ALL TERRAIN TRACTION TYRES

- Traction patterns, designed for on and off-the-road use, in all weather conditions.
- Patterns are engineered to provide excellent traction to drive wheels and are suited for both implement and industrial / construction applications.



GRIPKING R-1



GRIPKING HD



GRIPKING HD+



GRIPKING R-1 HD

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
3.50-6	GRIPKING R-1	4	2.5	TT	101	4.0	345	13.5	214	8.4	1340	52.8	7	13	165	363	2.6	38	45	A8/40 kmph	A8/25 mph
3.50-8	GRIPKING R-1	4	2.5	TT	101	4.0	372	14.6	218	8.6	1390	54.7	9	11	185	407	2.6	38	49	A8/40 kmph	A8/25 mph
4.00-8	GRIPKING R-1	4	3.0	TT	114	4.4	425	16.7	195	7.7	1251	49.3	10	13	170	374	1.6	23	46	A8/40 kmph	A8/25 mph
3.50-10	GRIPKING R-1	4	2.5	TT	101	4.0	440	17.3	205	8.1	1286	50.6	10	13	250	550	3.2	44	60	A8/40 kmph	A8/25 mph
4.00-10	GRIPKING R-1	4	3.0	TT	110	4.3	466	18.3	217	8.5	1364	53.7	10	13	300	660	3.5	50	60	A8/40 kmph	A8/25 mph
4.50-10	GRIPKING R-1	4	3.5	TT	130	5.1	483	19.0	227	8.9	1430	56.2	10	13	350	770	3.6	51	60	A8/40 kmph	A8/25 mph
5.00-10	GRIPKING R-1	4	4.0	TT	140	5.5	512	20.1	235	9.3	1508	59.4	10	13	400	880	3.7	53	60	A8/40 kmph	A8/25 mph
5.00-12	GRIPKING R-1	6	4.0	TT	145	5.7	580	22.8	271	10.7	1731	68.1	13	16	425	935	3.2	54	78	A8/40 kmph	A8/25 mph
5.00-12	GRIPKING R-1 HD	6	4.0	TT	145	5.7	580	22.8	271	10.7	1731	68.1	12	15	450	990	4.2	60	80	A8/40 kmph	A8/25 mph
6-12	GRIPKING R-1 HD	6	4.0	TT	153	6.0	585	23.0	276	10.9	1735	68.3	16	20	345	759	2.5	36	71	A8/40 kmph	A8/25 mph
6.5/80-12	GRIPKING HD	6	5.0	TT	165	6.5	590	23.2	279	11.0	1753	69.0	16	20	710	1562	3.7	53	96	A8/40 kmph	A8/25 mph
7.00-12	GRIPKING R-1	8	6.0	TT	187	7.4	683	26.8	305	12.0	2007	79.0	16	20	487	1071	2.5	35	88	A8/40 kmph	A6/20 mph
10.0/80-12	GRIPKING HD	8	9.0	TL	264	10.4	730	28.7	329	13.0	2186	86.1	19	24	1250	2750	3.1	44	116	A6/30 kmph	A6/20 mph
11.0/65-12	GRIPKING HD	10	9.0	TL	281	11.1	692	27.2	330	13.0	2057	81.0	21	26	1360	2992	3.6	51	119	A6/30 kmph	A6/20 mph
6.5/80-13	GRIPKING HD	6	5.0	TT	170	6.7	640	25.1	279	11.0	1753	69.0	16	20	930	2046	3.1	44	105	A6/30 kmph	A6/20 mph
6-14	GRIPKING R-1	4	5.0	TT	157	6.1	655	26.0	305	12.0	1956	77.0	26	32	300	660	2.0	28	66	A6/30 kmph	A6/20 mph
7-14	GRIPKING R-1	4	6.0	TT	180	7.0	691	27.2	330	13.0	2057	81.0	26	32	375	825	2.0	28	74	A6/30 kmph	A6/20 mph
4.00-15	GRIPKING R-1	4	3.0	TT	115	4.5	615	24.2	284	11.2	1819	71.6	14	18	260	572	3.2	45	61	A6/30 kmph	A6/20 mph
5.00-15	GRIPKING R-1	6	4.0	TT	145	5.7	657	25.8	305	12.0	1956	77.0	15	19	387	851	3.6	51	75	A6/30 kmph	A6/20 mph
6.5/80-15	GRIPKING R-1	8	5.0	TT	163	6.4	663	26.1	310	12.2	1976	77.8	15	19	950	2090	3.6	52	100	A8/40 kmph	A6/20 mph
690X180-15	GRIPKING R-1	6	5.0	TT	176	6.9	690	27.1	322	12.7	2055	80.9	15	19	810	1782	2.3	36	101	A8/40 kmph	A8/25 mph
7.5L-15	GRIPKING R-1	8	6.0	TT	210	8.2	795	31.2	356	14.0	2286	90.0	20	25	840	1848	3.7	52	102	A8/40 kmph	A8/25 mph
7.00-15	GRIPKING R-1	8	5.5	TT	183	7.2	715	28.0	331	13.0	2126	83.7	20	25	1050	2310	3.6	51	109	A8/40 kmph	A8/25 mph
7.50-15	GRIPKING R-1	8	6.0	TT	208	8.1	770	30.3	359	14.1	2308	90.9	20	25	1300	2860	5.0	71	118	A8/40 kmph	A8/25 mph
8.0/75-15	GRIPKING R-1	6	6.5	TT	199	7.8	708	27.8	326	12.8	2093	82.4	20	25	1100	2420	3.5	49	112	A8/40 kmph	A8/25 mph
10.0/75-15.3	GRIPKING HD	10	9.0	TL	267	10.5	780	30.7	356	14.0	2286	90.0	23	29	1550	3410	5.2	73	123	A8/40 kmph	A8/25 mph
	GRIPKING HD	14	9.0	TL	267	10.5	780	30.7	356	14.0	2286	90.0	23	29	1900	4180	7.1	100	130	A8/40 kmph	A8/25 mph
11.5/80-15.3	GRIPKING HD	10	9.0	TL	290	11.4	867	34.1	381	15.0	2540	100.0	23	29	1950	4290	3.3	48	131	A8/40 kmph	A8/25 mph
	GRIPKING HD	14	9.0	TL	290	11.4	867	34.1	381	15.0	2540	100.0	23	29	2130	4686	6.5	69	139	A8/40 kmph	A8/25 mph
4.00-16	GRIPKING R-1	6	3.0	TT	115	4.5	640	25.2	308	12.1	1932	76.1	9	11	290	638	3.0	44	65	A8/40 kmph	A8/25 mph
4.50-16	GRIPKING R-1	6	3.0	TT	122	4.8	655	25.8	311	12.2	1952	76.9	9	11	365	803	3.2	47	69	A8/40 kmph	A8/25 mph



FORESTRY TYRES

- Excellent for both Heavy Duty Agricultural and forestry applications which ensures good all-round performance in Forestry usage as well as good traction Load Capability and Durability in Agricultural / Forestry operations.
- Developed for use on powerful forestry Tractors / Machinery.
- Deep Tread lugs mean high traction at the work area.
- Long service life thanks to the use of a wear resistant tread compound.



GRIPKING HD

SIZE	RIM WIDTH	TUBETYPE/ TUBELESS	UNLOADED DIMENSION		STATIC LOADED RADIUS	ROLLING CIRCUM ± 2.5 %	PLY RATING	INFLATION PRESSURE	NSO	CONSTANT LOAD APPLICATION								
			SW	OD						SPEED KPH / MPH					RECOMMENDED LOAD KG / LBS			
										DRIVE WHEEL					FORESTRY USE			
			(mm) (inch)	(mm) (inch)						(mm) (inch)	(mm) (inch)	(mm) (inch)	(bar) (psi)	(mm) (32nds)	STATIC	10	20	30
								6	12	19	25	31	6*HT	6*LT				
24"	11.2-24	DW10 W10 W10H	TUBETYPE	284	1112.0	518	3346	14PR	2.0	28	2460	1610	1190	1140	1070	970	1070	1320
				11.2	43.8	20.4	131.7		29.0	35	5420	3550	2620	2510	2360	240	2360	2900
									2.2		2600	1700	1250	1210	1130	1030	1130	1390
									32.0		5730	3740	2750	2670	2490	2270	2490	3060
									32.0		5730	3740	2750	2670	2490	2270	2490	3060
									2.4		2740	1790	1320	1270	1190	1080	1190	1460
									35.0		6040	3940	2910	2800	2620	2380	2620	3220
									2.6		2880	1880	1390	1340	1250	1140	1250	1540
									38.0		6340	4140	3060	2950	2750	2510	2750	3380
									2.8		3010	1970	1450	1400	1310	1190	1310	1610
									41.0		6630	4340	3190	3080	2890	2620	2890	3550
									3.0		3130	2040	1510	1460	1360	1240	1360	1670
									44.0		6890	4490	3330	3220	3000	2730	3000	3690
	12.4-24	DW11 W11 DW10 W10	TUBETYPE	315	1175.0	524	3407	16PR	2.5	29	3400	2220	1640	1580	1480	1350	1480	1820
				12.4	46.25	20.6	134.1		36.0	36	7490	4890	3610	3480	3260	2970	3260	4010
									2.7		3570	2330	1720	1660	1550	1410	1550	1910
									39.0		7860	5130	3790	3660	3410	3110	3410	4190
									2.9		3700	2420	1790	1720	1610	1470	1610	1980
									42.0		8150	5330	3940	3790	3550	3240	3550	4370
									3.1		3860	2520	1860	1800	1680	1530	1680	2070
									45.0		8500	5550	4100	3960	3700	3370	3700	4550
									3.3		4000	2610	1930	1860	1740	1580	1740	2140
									48.0		8810	5750	4250	4100	3830	3480	3830	4710
									3.5		4140	2700	2000	1930	1800	1640	1800	2210
									51.0		9120	5950	4410	4250	3960	3610	3960	4870
					13.6-24	DW12 W12 W11	TUBETYPE	345	121.0	542	3531	16PR	1.5	29	3080	2010	1490	1430
13.6	47.6	21.3	139						22.0	36	6780	4430	3280	3150	2950	2690	2950	3630
									1.7		3310	2160	1600	1540	1440	1310	1440	1770
									25.0		7290	4760	3520	3390	3170	2890	3170	3900
									1.9		3520	2300	1700	1640	1530	1390	1530	1880
									28.0		7750	5070	3740	3610	3370	3060	3370	4150
									2.1		3750	2450	1810	1740	1630	1480	1630	2000
									30.0		8260	5400	3990	3830	3590	3260	3590	4420
									2.3		3930	2570	1900	1830	1710	1560	1710	2100
									33.0		8660	5660	4190	4030	3770	3440	3770	4640
									2.5		4140	2700	2000	1930	1800	1640	1800	2210
									3.0		9120	5950	4410	4250	3960	3610	3960	4870



SIZE	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	UNLOADED DIMENSION		STATIC LOADED RADIUS (mm) (inch)	ROLLING CIRCUM ± 2.5 % (mm) (inch)	PLY RATING	INFLATION PRESSURE (bar) (psi)	NSD (mm) (32nds)	CONSTANT LOAD APPLICATION									
			SW (mm) (inch)	OD (mm) (inch)						SPEED KPH / MPH		RECOMMENDED LOAD KG / LBS				FORESTRY USE			
										DRIVE WHEEL				10*HT	10*LT				
			STATIC	10						20	30	40	50	6*HT	6*LT				
24"	14.9-24	DW13 W13	TUBETYPE	378	1245.0	562	3673	16PR	1.5	32	3610	2360	1740	1680	1570	1430	1570	1930	
				14.9	49.0	22.1	144.6		22.0	40	7950	5200	3830	3700	3460	3150	3460	4260	
									1.7		3890	2540	1880	1810	1960	1540	1690	2080	
									25.0		8570	5990	4140	3990	3720	3390	3720	4580	
									1.9		4160	2720	2010	1940	1810	1650	1810	2230	
									28.0		9160	5990	4430	4270	3990	3630	3990	4910	
									2.1		4420	2880	2130	2050	1920	1750	1920	2360	
									30.0		9740	6340	4690	4520	4230	3850	4230	5200	
									2.5		4880	3180	2350	2270	2120	1930	2120	2610	
									36.0		10750	7000	5180	5000	4670	4250	4670	5740	
									3.0		5430	3540	2620	2530	2360	2150	2360	2900	
									44.0		11960	7800	5770	5570	5200	4740	5200	6400	
				26"	18.4-26	W16L W15L	TUBETYPE	467	1440	656	4273	16PR	1.1	40	4050	2640	1950	1880	1760
18.4	56.7	25.8	168.2						16.0	50	8920	5810	4300	4140	3880	2520	3880	4770	
									1.3		4490	2930	2160	2090	1950	1770	1950	2400	
									19.0		9890	6450	4760	4600	4300	3900	4300	5290	
									1.5		4850	3170	2340	2260	2110	1920	2110	2600	
									22.0		10680	6980	5150	4980	4650	4230	4650	5720	
									1.7		5254	3420	2530	2440	2280	2070	2280	2800	
									25.0		1150	7530	5570	5370	5020	4560	5020	6170	
									1.9		5590	3650	2700	2600	2430	2210	2430	2990	
									28.0		12310	8040	5950	5730	5350	4870	5350	6580	
									2.1		5920	3860	2860	2760	2575	2340	2575	3170	
									30.0		13040	8500	6300	6080	5670	5150	5670	6970	
28"	13.6-28	DW12 W12 W12D	TUBETYPE					345	1320	596	3863	16PR	1.5	36	3240	2120	1570	1510	1410
				13.6	51.9	23.4	152.1		22.0	45	7140	4670	3460	3330	3110	2820	3110	3830	
									1.7		3500	2280	1690	1630	1520	1380	1512	1870	
									25.0		7710	5020	3720	3590	3350	3040	3350	4120	
									1.9		3730	2430	1800	1730	1620	1470	1620	1990	
									28.0		8220	5350	3960	3810	3570	3240	3570	4390	
									2.1		3960	2580	1910	1840	1720	1570	1720	2120	
									30.0		8720	5680	4210	4050	3790	3460	3790	4660	
									2.3		4160	2720	2010	1940	1810	1650	1810	2230	
						33.0		9160	5990	4430	4270	3990	3630	3990	4910				
						2.5		4370	2850	2110	2030	1900	1730	1900	2340				
						36.0		9630	6280	4650	4470	4190	3810	4190	5150				
	14.9-28	DW13 W13 W12D W12	TUBETYPE	TUBETYPE	378	1365	618	4019	16PR	1.5	33	3840	2510	1850	1790	1670	1520	1670	2050
					14.9	53.7	24.3	158.2		22.0	41	8460	5530	4070	3940	3680	3350	3680	4530
										1.7		4120	2690	1990	1920	1790	1630	1790	2200
										25.0		9070	5930	4380	4230	3940	3590	3940	4850
										1.9		4390	2870	2120	2040	1910	1740	1910	2350
										28.0		9670	6320	4670	4490	4210	3830	4210	5180
										2.1		4670	3050	2250	2170	2030	1850	2030	2500
										30.0		10290	6720	4960	4780	4470	4070	4470	5500
										2.5		5180	3380	2500	2410	2250	2050	2250	2770
									36.0		11410	7440	5510	5310	4960	4520	4960	6100	
									3.0		5750	3750	2780	2680	2500	2280	2500	3080	
									44.0		12670	8260	6120	5900	5510	5020	5510	6780	
16.9-28	DW15L W15 W14L DW14	TUBETYPE	TUBETYPE	429	1440	645	4207	16PR	1.5	38	4740	3090	2290	2200	2060	1870	2060	2530	
				16.9	56.7	25.4	165.6		22.0	48	10440	6810	5040	4850	4540	4120	4540	5580	
									1.7		5080	3320	2450	2360	2210	2010	2210	2720	
									25.0		11190	7310	5400	5200	4870	4430	4870	5990	
									1.9		5430	3540	2620	2530	2360	2150	2360	2900	
									28.0		11960	7800	5770	5570	5200	4740	5200	6400	
									2.1		5750	3750	2780	2680	2500	2280	2500	3080	
									30.0		12670	8260	6120	5900	5510	5020	5510	6780	
									2.5		6370	4160	3070	2960	2770	2520	2770	3410	
									36.0		14030	9160	6760	6520	6100	5550	6100	7500	
									2.7		6670	4350	3220	3100	2900	2640	2900	3570	
									39.0		14690	9580	7090	6830	6390	5810	6390	7860	



SIZE	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	UNLOADED DIMENSION		STATIC LOADED RADIUS (mm) (inch)	ROLLING CIRCUM ≈ 2.5 % (mm) (inch)	PLY RATING	INFLATION PRESSURE (bar) (psi)	NSD (mm) (32nds)	CONSTANT LOAD APPLICATION									
			SW (mm) (inch)	OD (mm) (inch)						SPEED KPH / MPH					RECOMMENDED LOAD KG / LBS			FORESTRY USE	
										DRIVE WHEEL							10*HT	10*LT	
			STATIC	10						20	30	40	50	6*HT	6*LT				
30"	16.9-30	DW15L W15 W14L DW14	TUBETYPE	429	1485	684	4426	16PR	2.0	38	5800	3780	2800	2700	2520	2990	2520	3100	
				16.9	58.5	26.9	174.3		29.0	48	12780	8330	6170	5950	5550	5040	5550	6830	
				2.2					6120	3990	2950	2850	2660	2420	2660	3270			
				32.0					13480	8790	6500	6280	5860	5330	5860	7210			
				2.4					6440	4200	3110	3000	2800	2550	2800	3440			
				35.0					14190	9250	6850	6610	6170	5620	6170	7590			
				2.7					6900	4500	3330	3210	3000	2730	3000	3690			
	39.0				15200	9910	7330	7070	6610	6010	6610	8130							
	18.4-30	W16L DW16L W15L DW15L	TUBETYPE	467	1560	712	4618	16PR	1.6	38	5980	3900	2890	2780	2600	2370	2600	3200	
				18.4	61.4	28	181.8		23.0	48	13170	8590	6370	6120	5730	5220	5730	7050	
				1.8					6390	4170	3090	2970	2780	2530	2780	3420			
				26.0					14070	9190	6810	6540	6120	5570	6120	7530			
				2.0					6810	4440	3290	3170	2960	2690	2960	3640			
				29.0					15000	9780	7250	6980	6520	5930	6520	8020			
2.2							7200		4700	3470	3550	3130	2850	3130	3850				
32.0				15860	10350	7640	7380	6890	6280	6890	8470								
2.4				7570	4940	3650	3520	3290	2990	3290	4050								
35.0				16670	10880	8040	7750	7250	6590	7250	8920								
2.6				7940	5180	3830	3690	3450	3140	3450	4240								
38.0				17490	11410	8440	8130	7600	6290	7600	9350								
34"	16.9-34	DW15 W15L W14L	TUBETYPE	429	1590	722	4693	16PR	1.5	40	5130	3350	2480	2390	2230	2030	2230	2740	
				16.9	62.6	28.4	184.8		22.0	50	11300	7380	5460	5260	4910	4470	4910	6040	
				1.7					5500	3590	2650	2560	2390	2170	2390	2940			
				25.0					12110	7910	5840	5640	5260	4780	5260	6470			
				1.9					5890	3840	2840	2740	2560	2330	2560	3150			
				28.0					12970	8460	6260	6040	5640	5130	5640	6940			
				2.1					6230	4070	3010	2900	2710	2470	2710	3330			
	30.0				13720	8960	6630	6390	5970	5440	5970	7340							
	2.3				6580	4290	3170	3060	2860	2600	2860	3520							
	33.0				14490	9450	6980	6740	6300	5730	6300	7750							
	2.5				6900	4500	3330	3210	3000	2730	3000	3690							
	36.0				15200	9910	7330	7070	6610	6010	6610	8130							
	18.4-34	W16L DW16 W15L DW15L	TUBETYPE	467	1671	750	4914	16PR	1.5	38	6390	4170	3090	2970	2780	2530	2780	3420	
				18.4	65.8	29.5	193.5		22.0	48	14070	9190	6810	6540	6120	5570	6120	7530	
1.7							6880		4490	3320	3200	2990	2720	2990	3680				
25.0							15150		9890	7310	7050	6590	5990	6590	8110				
1.9							7340		4790	3540	3410	3190	2900	3190	3920				
28.0							16170		10550	7800	7510	7030	6390	7030	8650				
2.1							7800		5090	3760	3630	3390	3080	3390	4170				
30.0				17180	11210	8280	8000	7470	6780	7470	9190								
2.3				8210	5360	3960	3820	3570	3250	3570	4390								
33.0				18080	11810	8270	8410	7860	7160	7860	9670								
2.5				8630	5630	4160	4010	3750	3410	3750	4610								
36.0				19010	12400	9160	8830	8260	7510	8260	10160								
38"	16.9-38	W15L DW15 W14L	TUBETYPE	429	1675	772	5007	16PR	1.6	40	5640	3680	2720	2620	2420	2230	2450	3010	
				16.9	65.9	30.4	197.1		23.0	50	12420	8110	5990	5770	5400	4910	5400	6640	
				1.8					6030	3930	2910	2800	2620	2380	2620	3220			
				26.0					13280	8660	6410	6170	5770	5240	5770	7100			
				2.0					6420	4190	3100	2990	2790	2540	2790	3430			
				29.0					14140	9230	6830	6590	6150	5590	6150	7560			
				2.2					6790	4430	3270	3160	2950	2680	2950	3630			
	32.0				14960	9760	7200	6960	6500	5900	6500	8000							
	2.4				7130	4650	3440	3320	3100	2820	3100	3810							
	35.0				15700	10240	7580	7310	6830	6210	6830	8400							
	2.6				7480	4880	3610	3480	3250	2960	3250	4000							
	38.0				16480	10750	7950	7670	7160	6520	7160	8810							



APPLICATION
FORESTRY



SIZE	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	UNLOADED DIMENSION		STATIC LOADED RADIUS (mm) (inch)	ROLLING CIRCUM ± 2.5 % (mm) (inch)	PLY RATING	INFLATION PRESSURE (bar) (psi)	NSD (mm) (32nds)	CONSTANT LOAD APPLICATION											
			SW (mm) (inch)	OD (mm) (inch)						SPEED KPH / MPH		RECOMMENDED LOAD KG / LBS				FORESTRY USE					
										DRIVE WHEEL		10'HT		10'LT							
			STATIC	10						20	30	40	50	6'HT	6'LT						
38"	18.4-38	W16L 16DD W16A DW15L	TUBETYPE	467	1768	813	5217	16PR	38	6600	4310	3190	3070	2870	2610	2870	3530				
				18.4	69.6	31.6	205.4			48	14540	9490	7030	6760	6320	5750	6320	7770			
													1.7	7110	4640	3430	3310	3090	2810	3090	3800
													25.0	15660	10220	7560	7290	6810	6190	6810	8380
													1.9	7590	4950	3660	3530	3300	3000	3300	4060
													28.0	16720	10900	8060	7780	7270	6610	7270	8940
													2.1	8050	5250	3890	3750	3500	3191	3500	4310
													30.0	17730	11560	8570	8260	7710	7030	7710	9480
													2.3	8490	5540	4100	3950	3690	3360	3690	4540
													33.0	18700	12200	9030	8700	8130	7400	8130	10000
													2.5	8910	5810	4300	4150	3875	3530	3875	4770
													36.0	19630	12800	9470	9140	8540	7780	8540	10500





APPLICATION
TRAILOR



AGRICULTURE TRAILER & VINTAGE VEHICLE TYRES



SULTAN



RANGER



MILESTONE +



LANDMARK



STORM



MILLENNIUM



DUST STORM



TRACKGRIP



APPLICATION
TRAILOR



INDUSTRIAL ALL PURPOSE



SAMRAT

AGRICULTURE TRAILER TYRES

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	22nds	kg	lbs	bar	psi		kmph	mph
4.80-8	SULTAN	6	3.8	TT	122	4.8	420	16.5	8	10	335	737	6.3	89	70	A8/40 kmph	A8/25 mph
5.70-8	SULTAN	8	4.5	TT	150	5.9	467	18.3	8	10	488	1074	7.1	100	83	A8/40 kmph	A8/25 mph
4.50-10	RANGER	6	3.5	TT	132	5.2	490	19.3	10	13	467	1027	4.4	62	82	A8/40 kmph	A8/25 mph
5.00-10	RANGER	8	3.5	TT	135	5.3	510	20.0	10	13	580	1276	5.1	72	89	A8/40 kmph	A8/25 mph
145-10	RANGER	6	3.5	TT	140	5.5	500	19.7	8	10	355	781	4.3	61	72	A8/40 kmph	A8/25 mph
7.50-10	INDUSTRIAL ALL PURPOSE	10	5.5	TT	206	8.1	645	25.3	10	13	1360	2992	7.1	100	120	A8/40 kmph	A8/25 mph
4.80-12	RANGER	6	3.8	TT	127	5.0	526	20.7	7	9	450	990	6.3	89	80	A8/40 kmph	A8/25 mph
5.30-12	MILESTONE+	6	4.3	TT	135	5.3	550	21.6	7	9	475	1045	5.6	79	82	A8/40 kmph	A8/25 mph
5.65-12	MILESTONE+	6	4.0	TT	140	5.5	520	20.5	7	9	272	598	2.2	31	64	A8/40 kmph	A8/25 mph
145D-12	MILESTONE+	8	4.0	TT	140	5.5	540	21.2	8	10	375	825	2.3	32	74	A8/40 kmph	A8/25 mph
155D-12	MILESTONE+	6	4.5	TT	155	6.1	558	22.0	10	13	485	1067	3.6	51	83	A8/40 kmph	A8/25 mph
155D-12	MILESTONE+	10	4.5	TT	155	6.1	558	22.0	10	13	625	1375	6.3	89	92	A8/40 kmph	A8/25 mph
5.60-13	LANDMARK	6	4.0	TT	155	6.1	595	23.4	6	8	385	847	2.8	40	75	A8/40 kmph	A8/25 mph
165D-13	LANDMARK	6	4.5	TT	165	6.5	596	23.5	6	8	475	1045	2.8	40	82	A8/40 kmph	A8/25 mph
E78-14	STORM	6	5.5	TT	188	7.4	656	25.8	11	14	620	1364	2.2	31	91	A8/40 kmph	A8/25 mph
175D-14	STORM	6	5.0	TT	178	7.0	656	25.8	11	14	615	1353	3.1	41	91	A8/40 kmph	A8/25 mph
5.90-15	MILESTONE+	8	4.0	TT	150	5.9	670	26.4	6	8	460	1012	2.0	28	81	A8/40 kmph	A8/25 mph
F78-15	MILLENNIUM	6	5.5	TT	198	7.8	694	27.3	12	15	760	1672	3.5	50	98	A8/40 kmph	A8/25 mph
195/80D-15	MILESTONE+	8	5.5	TT	195	7.6	697	27.4	7	9	775	1705	4.2	60	99	A8/40 kmph	A8/25 mph
9.00-15	DUST STORM	8	6.5	TT	254	10.0	865	34.0	10	13	1100	2420	3.5	50	112	A8/40 kmph	A8/25 mph
9.00-16	DUST STORM	8	6.5	TT	254	10.0	898	35.3	12	15	1210	2662	3.5	50	115	A8/40 kmph	A8/25 mph
215/75-17.5	TRACKGRIP	12	6.8	TT	213	8.4	780	30.7	8	10	2120	4664	7.0	100	134	A8/40 kmph	A8/25 mph
215/75-17.5	TRACKGRIP	16	6.8	TT	213	8.4	780	30.7	8	10	2650	5830	9.0	128	142	A8/40 kmph	A8/25 mph
225/75-17.5	TRACKGRIP	16	6.8	TT	224	8.8	795	31.3	8	10	2900	6380	9.0	128	145	A8/40 kmph	A8/25 mph
235/75-17.5	TRACKGRIP	16	6.8	TT	236	9.3	810	31.9	8	10	3400	7480	9.0	128	151	A8/40 kmph	A8/25 mph

VINTAGE VEHICLE TYRES

8.25-10	INDUSTRIAL ALL PURPOSE	8	6.0	TT	211	8.3	675	26.5	10	13	1375	3025	7.1	100	120	A3/15 kmph	A3/9 mph
5.00-19	VIRAT	6	3.0	TT	135	5.3	746	29.3	5	6	670	1474	3.8	54	94	A3/15 kmph	A3/9 mph
6.00-19	SAMRAT	8	3.62	TT	160	6.3	800	31.5	6	8	925	2035	4.2	60	105	A3/15 kmph	A3/9 mph
7.00-19	SAMRAT	10	5.0	TT	193	7.6	860	33.8	7	9	1360	2992	5.2	74	119	A3/15 kmph	A3/9 mph
	SAMRAT	12	5.0	TT	193	7.6	860	33.8	7	9	1450	3190	5.4	76	121	A3/15 kmph	A3/9 mph
8.00-19	SAMRAT	10	5.0	TT	221	8.7	910	35.8	6	8	1650	3630	5.2	74	125	A3/15 kmph	A3/9 mph



APPLICATION
MOUNTAIN USAGE

MOUNTAIN TYRES

- Unique tyre specifically designed for hilly terrain usage.

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE	
					mm	inch	mm	inch	mm	22nds	kg	lbs	bar	psi
330/55-12	MT-777	4	10.6	TL	340	13.4	655	25.8	69	55	350	770	2.1	30





APPLICATION
GARDEN &
LAWN MOWER



LAWN & GARDEN TYRES

- The tough tires withstand long hours of cutting leaving trace of their path.
- Unmatched stability, durability and puncture resistance.
- Strong sidewall and long service life thanks to the use of a wear resistant tread compound.



SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
2.80/2.50-4	AVANTI	4	2.0	TT	69	2.7	218	8.6	103	4.1	661	26.0	3	4	95	209	1.4	20	26	A3/15 kmph	A3/9 mph
3.00-4	SUPER GRIP	4	2.0	TT	85	3.3	259	10.2	122	4.8	783	30.8	3	4	110	242	1.6	23	32	A3/15 kmph	A3/9 mph
4.10/3.50-4	VENUS	4	3.0	TT	105	4.1	279	11.0	132	5.2	847	33.3	3	4	160	352	1.6	23	44	A3/15 kmph	A3/9 mph
13X5.00-6	TRACKING	4	3.5	TL	130	5.1	317	12.5	145	5.7	943	37.1	3	4	200	440	2.8	40	52	A3/15 kmph	A3/9 mph
15X6.00-6	TRACKING	6	4.5	TL	155	6.1	366	14.4	160	6.3	1059	41.7	5	6	335	737	3.2	45	70	A3/15 kmph	A3/9 mph
15X6.00-6	TRACKING	10	4.5	TL	155	6.1	366	14.4	160	6.3	1059	41.7	5	6	400	880	3.5	50	76	A3/15 kmph	A3/9 mph
16X6.50-8	TRACKING	6	5.0	TL	170	6.7	406	16.0	182	7.2	1183	47.0	5	6	355	781	3.0	42	72	A3/15 kmph	A3/9 mph
16X6.50-8	TRACKING	10	5.0	TL	170	6.7	406	16.0	182	7.2	1183	47.0	5	6	430	946	3.9	55	78	A3/15 kmph	A3/9 mph



APPLICATION
GOLF CART

GOLF CART TYRES

- Design with a smooth wide profile and rounded shoulders for smooth sure footed ride.
- Superior Tread compound for longer life.
- Dual application tire intended for use on utility, golf as well as a wide variety of trailer applications.



SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
18X8.50-8	POWER PLUS	6	5.5	TL	216	8.5	460	18.1	202	8.0	1334	53.0	6	8	475	1045	3.5	50	82	A3/15 kmph	A3/9 mph
20.5X8.00-10	POWER PLUS HD	10	6.0	TL	203	8.0	528	20.8	223	8.8	1450	57.1	7	9	705	1550	6.0	85	96	A3/15 kmph	A3/9 mph
22.5X8.00-12	POWER PLUS HD	10	6.5	TL	221	8.7	546	21.5	254	10.0	1560	61.4	7	9	1190	2618	7.0	99	110	A3/15 kmph	A3/9 mph



APPLICATION
SPORTS
GROUND VEHICLES

SPORTS GROUND TYRES

- Unique tyre specifically designed for sports ground.
- Suitable for cricket, football, baseball & hockey grounds.



SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	bar	psi		kmph	mph
4.00-8	FIELD STAR	4	3.75	TL	122	4.8	420	16.6	2.8	40	56	A8/40 kmph	A8/25 mph

INDUSTRIAL TYRES





SKID STEER TYRES

- **MONSTER** - Extra deep tread with sturdy lug design, strong casing with heat and cut resistant tread compound provide longer life. Extra thick side wall with rim guard gives protection against damage.



MONSTER

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs		bar	psi
23X8.50-12	MONSTER	8	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	22.0	27.5	690	1518	3.5	50	90	A5/25 kmph	A5/16 mph
27X8.50-15	MONSTER	10	7.0	TL	218	8.6	676	26.6	305	12.0	2006	79.0	22.0	27.5	1000	2200	4.3	61	106	A5/25 kmph	A5/16 mph
10-16.5	MONSTER	12	8.25	TL	259	10.2	798	31.4	366	14.4	2337	92.0	43.0	53.7	2180	4796	4.4	64	135	A5/25 kmph	A5/16 mph
12-16.5	MONSTER	14	9.75	TL	307	12.1	838	33.0	384	15.1	2515	99.0	44.0	55.0	2765	6083	4.8	70	144	A5/25 kmph	A5/16 mph
14-17.5	MONSTER	14	10.5	TL	358	14.1	935	36.8	427	16.8	2743	108.0	44.0	55.0	3900	8580	5.5	78	155	A5/25 kmph	A5/16 mph
20.5-25	MONSTER	20	17.25	TT/TL	531	20.9	1486	58.5	686	27.0	4394	173.0	60.0	75.0	9500	20900	4.5	64	186	A2/10 kmph	A2/6 mph
															6000	13200	3.2	45	170	B/50 kmph	B/30 mph

- **ROCK MASTER** - Deeper depth tyre tread for longer life. Bigger and sturdier blocks. Excellent chip & tear resistance compound. Extra thick side wall with rim guard gives protection against damages.



ROCK MASTER

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
10-16.5	ROCK MASTER	12	8.25	TL	267	10.5	790	31.1	356	14.0	2337	92	30	37	2180	4796	5.3	75	135	A5/25 kmph	A5/16 mph
12-16.5	ROCK MASTER	14	9.75	TL	325	12.8	856	33.7	381	15.0	2514	99	34	43	2765	6083	4.9	70	144	A5/25 kmph	A5/16 mph

- **ROCKPLUS HD** - Deep tread, extra thick sidewall & tough casing ensure longer life. silica & natural rubber base compound provides greater chip & tear resistance.



ROCK PLUS HD

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
10-16.5	ROCK PLUS HD	12	8.25	TL	268	10.5	790	31.1	356	14.0	2286	90.0	30	38	2140	4708	5.2	74	134	A5/25 kmph	A5/16 mph
12-16.5	ROCK PLUS HD	14	9.75	TL	325	12.8	866	34.1	381	15.0	2438	96.0	30	38	2240	4928	6.2	89	136	A5/25 kmph	A5/16 mph
10.00-20	ROCK PLUS HD	18	7.5	TT	284	11.2	1080	42.5	508	20.0	3175	125.0	30	38	6900	15180	10.2	145	175	A5/25 kmph	A5/16 mph
12.00-20	ROCK PLUS HD	20	8.5	TT	320	12.6	1151	45.3	530	20.9	3390	133.5	34	42	9250	20350	10.2	145	185	A5/25 kmph	A5/16 mph



- **STEERKING HD+** - Premium conventional skid steer tyre with deeper tread depth, premium compound, large tread lugs & heavier sidewall.



STEERKING HD+

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
10-16.5	STEERKING HD+	8	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	16	20	1370	3014	4.2	60	119	A5/25 kmph	A5/16 mph
	STEERKING HD+	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	16	20	1560	3432	5.3	75	123	A5/25 kmph	A5/16 mph
12-16.5	STEERKING HD+	10	9.75	TL	325	12.8	853	33.6	381	15.0	2438	96.0	20	25	1860	4092	4.5	64	129	A5/25 kmph	A5/16 mph
	STEERKING HD+	12	9.75	TL	325	12.8	853	33.6	381	15.0	2438	96.0	20	25	2060	4532	5.2	74	132	A5/25 kmph	A5/16 mph

- **STEER PLUS HD** - Premium tyre with extra deep tread & thick sidewalls providing better traction, puncture resistance and longer life. Specially designed rim guard ensures greater protection against flats & wheel damage in the rim flange area.



STEER PLUS HD

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
23X8.50-12	STEER PLUS HD	6	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	12	15	615	1353	3.4	50	90	A5/25 kmph	A5/16 mph
27X8.50-15	STEER PLUS HD	8	7.0	TL	218	8.6	676	26.6	305	12.0	2006	79.0	12	15	950	2090	4.2	61	106	A5/25 kmph	A5/16 mph
31X13-16.5	STEER PLUS HD	14	9.75	TL	328	12.9	803	31.6	356	14.0	2337	92.0	19	24	2435	5357	4.7	68	139	A5/25 kmph	A5/16 mph
33X15.5-16.5	STEER PLUS HD	14	12.0	TL	394	15.5	838	33.0	381	15.0	2464	97.0	19	24	3150	6930	5.2	74	148	A5/25 kmph	A5/16 mph
14-17.5	STEER PLUS HD	14	10.5	TL	348	13.7	940	37.0	406	16.0	2743	108.0	26	33	2900	6380	5.5	79	145	A5/25 kmph	A5/16 mph
15-19.5	STEER PLUS HD	14	11.8	TL	401	15.8	1036	40.8	457	18.0	3048	120.0	26	33	3350	7370	4.8	70	150	A5/25 kmph	A5/16 mph

- **STEERKING+** - Wide wall tyres with side wall and rim guard protectors; meant for the value conscious performance oriented applications.



STEERKING +

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
10-16.5	STEERKING +	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	15	19	1565	3443	5.2	75	123	A5/25 kmph	A5/16 mph
12-16.5	STEERKING +	12	9.75	TL	312	12.3	825	32.5	381	15.0	2438	96.0	16	20	2060	4532	5.2	75	133	A5/25 kmph	A5/16 mph



APPLICATION
CONSTRUCTION
MACHINERY



DRIVE WHEEL

R-3 TYRES

- Tread specially designed to give minimum ground disturbance.
- Suitable for use on orchards, soft soil, road construction and similar applications.



SW-333

SIZE	PATTERN	PLY RATING	RIM WIDTH		TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi	kmph		mph	
14.9-24	SW-333	8	13.0		TL	378	14.9	1262	49.7	574	22.6	3835	151.0	14	23	1286	3570	1.8	26	141	A6/30 kmph	A6/20 mph
23.1-26	SW-333	8	20.0		TL	587	23.1	1560	61.4	686	27.0	4547	179.0	26	33	2900	6380	1.0	16	145	A6/30 kmph	A6/20 mph
	SW-333	12	20.0		TL	587	23.1	1560	61.4	686	27.0	4547	179.0	26	33	3650	8030	1.7	26	153	A6/30 kmph	A6/20 mph
	SW-333	16	20.0		TL	587	23.1	1560	61.4	686	27.0	4547	179.0	26	33	4375	9625	2.1	33	159	A6/30 kmph	A6/20 mph
18.4-26	SW-333	12	16.0		TL	475	18.7	1430	56.3	635	25.0	4140	163.0	24	30	3000	6600	2.2	33	146	A6/30 kmph	A6/20 mph
13.6-28	SW-333	8	12.0		TL	345	13.6	1318	51.9	587	23.1	3835	152.0	14	23	1168	2830	1.5	22	141	A6/30 kmph	A6/20 mph



APPLICATION
CONSTRUCTION
MACHINERY

EXCAVATOR TYRES

- Speedways Excavator Tyres are designed to heavy duty service.
- Specially engineered tread pattern provides excellent traction, good self cleaning as well as good on the road drive ability.



EV-999

SIZE	PATTERN	PLY RATING	RIM WIDTH		TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			STD.	ALT.		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
			inch	inch																		
8.25-20	EV-999	14	6.5	7.0	TT	236	9.3	980	38.6	457	18.0	2972	117.0	18	23	2065	4543	6.8	98	133	B/50 kmph	B/30 mph
9.00-20	EV-999	14	7.0	7.5	TT	257	10.1	1039	40.9	483	19.0	3073	121.0	20	25	2500	5500	7.0	102	140	B/50 kmph	B/30 mph
10.00-20	EV-999	16	7.5	8.0	TT	277	10.9	1075	42.3	508	20.0	3175	125.0	24	30	3000	6600	7.6	109	146	B/50 kmph	B/30 mph



APPLICATION
CONSTRUCTION
MACHINERY

INDUSTRIAL TYRES

- Premium tyres with superior tread compound, larger tread lugs and extra heavy sidewall.



OFFROADER



DUGRIGGER

SIZE	PATTERN	PLY RATING	RIM WIDTH		TT or TL	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED		
			inch	mm		inch	mm	inch	mm	inch	kg	lbs	bar	psi	kmph		mph		
240/55D17.5	OFFROADER	10	6.75		TL	229	9.0	731	28.7	12	15	2100	4620	7.0	99	134	B/50 kmph	B/30 mph	
355/55D625	DUGRIGGER	14	11.75		TL	355	14.0	935	36.8	20	25	3550	7810	3.7	53	152	B/50 kmph	B/30 mph	
385/65D19.5	DUGRIGGER									UNDER DEVELOPMENT									
385/65D22.5	DUGRIGGER									UNDER DEVELOPMENT									

INDUSTRIAL TRACTOR TYRES

- Extra wide lugs designed to resist buckling, tearing & cracking.
- Excellent tread wear and road ability, the laterally designed lugs result in even wear.



F-3



AT-999



MPT



MONSTER



POWER LUG R-4

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD mm / cords	LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED		
					mm	inch	mm	inch	mm	inch	mm	inch		kg	lbs	bar	psi		kmph	mph	
11L-15	F-3	10	8.0	TL	280	11.0	813	32.0	355	14.0	2362	93.0	11	14	1060	2332	3.7	53	110	A8/40 kmph	A8/25 mph
33x12.5-15	AT-999	8	10.0	TL	318	12.5	851	33.5	381	15.0	2489	98.0	20	25	2130	4486	3.2	46	131	A8/40 kmph	A8/25 mph
11L-16	F-3	12	8.0	TL	280	11.0	820	32.3	381	15.0	2438	96.0	10	14	1250	2750	4.5	64	116	A8/40 kmph	A8/25 mph
	F-3	14	8.0	TL	280	11.0	820	32.3	381	15.0	2438	96.0	10	14	1375	3025	4.9	70	119	A8/40 kmph	A8/25 mph
11L-16	MONSTER	14	8.0	TL	280	11.0	820	32.3	381	15.0	2438	96.0	22	14	1375	3025	4.9	70	119	A8/40 kmph	A8/25 mph
12.5/70-16	AT-999	14	10.0	TL	315	12.4	853	33.6	381	15.0	2590	102.0	20	25	1650	3630	2.7	38	125	A8/40 kmph	A8/25 mph
10.5/80-18	MPT	10	9.0	TL	267	10.8	910	35.8	406	16.0	2667	105.0	23	29	1950	4290	3.8	54	131	A8/40 kmph	A8/25 mph
12.5/65-18	MPT	12	9.0	TL	305	12.0	950	37.4	415	16.3	2781	109.5	23	29	2450	5390	3.6	51	140	A8/40 kmph	A8/25 mph
12.5/80-18	MPT	12	9.0	TL	307	12.1	988	38.9	432	17.0	2896	114.0	24	30	2650	5830	3.7	53	142	A8/40 kmph	A8/25 mph
	MPT	16	9.0	TL	307	12.1	988	38.9	432	17.0	2896	114.0	24	30	3150	6930	4.9	70	148	A8/40 kmph	A8/25 mph
	MONSTER	16	9.0	TL	305	12.0	975	38.4	432	17.0	2896	114.0	33	44	2650	5830	3.6	55	142	A8/40 kmph	A8/25 mph
15.5/60-18	AT-999	14	13.0	TL	401	15.8	950	37.4	432	17.0	2870	113.0	22	28	2400	5280	2.6	38	139	A8/40 kmph	A8/25 mph
15.5/70-18	AT-999	10	13.0	TL	401	15.8	1031	40.6	483	19.0	3099	122.0	22	28	2650	5830	2.6	37	139	A8/40 kmph	A8/25 mph
17.5/65-20	AT-999	14	14.0	TL	450	17.7	1090	42.9	483	19.0	3302	130.0	25	31	3200	7040	2.4	35	149	A8/40 kmph	A8/25 mph
16.9-24	AT-999	12	15.0	TL	450	17.7	1303	51.3	584	23.0	3785	149.0	30	38	3250	7150	2.6	38	149	A8/40 kmph	A8/25 mph
16.9-24	AT-999	16	15.0	TL	450	17.7	1303	51.3	584	23.0	3785	149.0	30	38	3900	8580	3.3	48	155	A8/40 kmph	A8/25 mph
17.5L-24	AT-999	12	15.0	TL	452	17.8	1270	50.0	559	22.0	3683	145.0	28	35	3159	6950	2.6	38	148	A8/40 kmph	A8/25 mph
17.5L-24	AT-999	16	15.0	TL	452	17.8	1270	50.0	559	22.0	3683	145.0	28	35	3790	8338	3.3	48	154	A8/40 kmph	A8/25 mph
18.4-24	AT-999	12	16.0	TL	472	18.6	1372	54.0	603	24.0	4039	159.0	28	35	3875	8525	2.5	35	155	A8/40 kmph	A8/25 mph
19.5L-24	AT-999	12	17.0	TL	495	19.5	1321	52.0	584	23.0	3835	151.0	28	35	3450	7590	2.3	33	151	A8/40 kmph	A8/25 mph
16.9-24	POWER LUG R-4	12	15.0	TL	440	17.3	1308	51.5	584	23.0	3861	152.0	28	35	3250	7150	2.6	38	149	A8/40 kmph	A8/25 mph
17.5L-24	POWER LUG R-4	12	15.0	TL	445	17.5	1270	50.0	559	22.0	3683	145.0	28	35	3150	6930	2.6	38	148	A8/40 kmph	A8/25 mph
18.4-24	POWER LUG R-4	12	16.0	TL	472	18.6	1375	54.1	603	22.7	4039	159.0	28	35	3875	8525	2.4	35	155	A8/40 kmph	A8/25 mph
19.5L-24	POWER LUG R-4	12	17.0	TL	495	19.5	1321	52.1	584	23.0	3835	151.0	28	35	3450	7590	2.0	33	151	A8/40 kmph	A8/25 mph
	POWER LUG R-4	16	17.0	TL	495	19.5	1325	51.9	584	23.0	3835	151.0	28	35	4135	9097	3.0	44	157	A8/40 kmph	A8/25 mph
	MONSTER	16	17.0	TL	490	19.3	1298	51.1	589	23.2	3835	151.0	38	48	4135	9097	3.0	44	157	A8/40 kmph	A8/25 mph
21L-24	POWER LUG R-4	12	18.0	TL	533	21.0	1377	54.2	610	24.0	3988	157.0	29	36	3875	8525	2.1	31	155	A8/40 kmph	A8/25 mph
18.4-26	AT-999	12	16.0	TL	480	18.9	1422	56.0	635	25.0	4140	163.0	30	38	4010	8822	2.4	36	156	A8/40 kmph	A8/25 mph
	MONSTER	12	16.0	TL	475	18.7	1425	56.1	635	25.0	4191	165.0	28	38	4000	8800	2.4	36	156	A8/40 kmph	A8/25 mph
	POWER LUG R-4	12	16.0	TL	475	18.7	1425	56.1	635	25.0	4191	165.0	28	38	4000	8800	2.4	36	156	A8/40 kmph	A8/25 mph
	POWER LUG R-4	16	16.0	TL	475	18.7	1425	56.1	635	25.0	4191	165.0	28	38	4375	9625	2.8	41	159	A8/40 kmph	A8/25 mph
16.9-28	MONSTER	12	15.0	TL	440	17.3	1410	55.5	635	25.0	4140	163.0	30	38	3550	7810	2.6	38	152	A8/40 kmph	A8/25 mph
	AT-999	12	15.0	TL	450	17.7	1410	55.5	635	25.0	4140	163.0	30	38	3550	7810	2.6	38	152	A8/40 kmph	A8/25 mph
	POWER LUG R-4	12	15.0	TL	440	17.3	1410	55.5	635	25.0	4140	163.0	30	38	3550	7810	2.6	38	152	A8/40 kmph	A8/25 mph
16.9-30	POWER LUG R-4	12	15.0	TL	440	17.3	1460	57.5	660	26.0	4216	166.0	30	38	3650	8030	2.4	36	153	A8/40 kmph	A8/25 mph



APPLICATION
EARTH MOVER



EARTHMOVER TYRES

- The special non-directional tread design formulated with silica based tread compound, together with a heavy duty nylon carcass makes it capable of withstanding cuts, snags and bruises under all service conditions.



SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
9.00-20	ROCK LUG	18	7.5	TT	259	10.2	1035	40.7	476	18.7	3056	120.3	18	23	2260	4972	7.0	99	136	B/50 kmph	B/30 mph
10.00-20	ROCK LUG	20	8.0	TT	274	10.8	1075	42.3	494	19.4	3171	124.8	18	23	2750	6050	7.6	109	143	B/50 kmph	B/30 mph
17.5/65-20	ROCK LUG	16	14	TL	450	17.7	1090	42.9	483	19.0	3302	130.0	25	31	7040	3200	2.4	35	149	B/50 kmph	B/30 mph
14.00-24	ROCK LUG	24	10.0	TL	373	14.7	1368	53.8	635	25.0	4039	159.0	25	31	9500	20900	8.6	124	186	A2/10 kmph	A2/6 mph
16.9-24	ROCK LUG	12	15.0	TL	460	18.1	1310	52.5	584	23.0	3785	149.0	26	32	3257	7165	2.6	38	149	A2/10 kmph	A2/6 mph
17.5L-24	ROCK LUG	12	15.0	TL	462	18.2	1280	50.0	559	22.0	3683	145.0	26	32	3908	8598	3.3	48	155	A2/10 kmph	A2/6 mph
14.00-25	ROCK LUG	24	10.0	TL	375	14.8	1374	54.1	635	25.0	4039	159.0	25	31	9500	20900	8.6	124	186	A2/10 kmph	A2/6 mph
15.5-25	ROCK LUG	12	12.0	TL	394	15.5	1278	50.3	569	22.4	3658	144.0	25	31	5600	12320	4.0	58	168	A2/10 kmph	A2/6 mph
15.5-25	ROCK LUG	16	12.0	TL	394	15.5	1278	50.3	569	22.4	3658	144.0	25	31	6250	13750	4.5	101	168	A2/10 kmph	A2/6 mph
17.5-25	ROCK LUG	16	14.0	TL	432	17.0	1344	52.9	635	25.0	3955	156.0	28	35	7300	16060	3.0	44	158	A2/10 kmph	A2/6 mph
17.5-25	ROCK LUG	20	14.0	TL	432	17.0	1344	52.9	635	25.0	3955	156.0	28	35	8250	18150	4.0	58	164	A2/10 kmph	A2/6 mph
20.5-25	ROCK LUG	16	17.0	TL	531	20.9	1486	58.5	686	27.0	4394	173.0	31	39	8268	18190	2.7	40	167	A2/10 kmph	A2/6 mph
20.5-25	ROCK LUG	20	17.0	TL	531	20.9	1486	58.5	686	27.0	4394	173.0	31	39	9520	20944	3.2	47	170	A2/10 kmph	A2/6 mph
23.5-25	ROCK LUG																				

UNDER DEVELOPMENT



APPLICATION
FORK LIFT

INDUSTRIAL FORKLIFT TYRES

- Premium tyre, designed for heavy duty service on forklift trucks, material handling & mining equipment.
- The deep tread, extra thick sidewalls & touch casing provide exceptional durability & minimize the risk of punctures & accidental damages.
- Silica & natural rubber in tread compound provides greater chip and rear resistance.
- Specially designed rim guard ensures protection against flats & wheel damages in the rim flange area



SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
4.80/4.00-8	LIFTKING HD	8	3.0	TT	117	4.6	414	16.3	7	9	530	1166	10.2	145	86	A6/30 kmph	A6/20 mph
5.70/5.00-8	LIFTKING HD	10	3.0	TT	132	5.2	467	18.3	7	9	1415	3113	10.2	145	120	A6/30 kmph	A6/20 mph
6.90/6.00-9	LIFTKING HD	10	4.0	TT	160	6.3	540	21.2	10	13	1715	3773	8.7	124	126	A6/30 kmph	A6/20 mph
6.50-10	LIFTKING HD	12	5.0	TT	178	7.0	595	23.4	11	14	2180	4796	9.9	141	135	A6/30 kmph	A6/20 mph
7.00-12	LIFTKING HD	14	5.0	TT	180	7.1	690	27.1	12	15	2750	6050	9.2	131	143	A6/30 kmph	A6/20 mph
23x5	LIFTPOWER	10	4.0	TT	155	6.1	635	25.0	10	13	1985	4367	8.0	114	132	A6/30 kmph	A6/20 mph
7.00-15	LIFTKING HD	12	5.5	TT	201	7.9	749	30.4	16	20	3075	6765	8.8	125	147	A6/30 kmph	A6/20 mph
7.50-15	LIFTKING HD	14	6.0	TT	211	8.3	772	28.3	14	18	3000	6600	10.0	142	146	A6/30 kmph	A6/20 mph
28x9-15	LIFTKING HD	14	7.0	TT	213	8.4	720	33.7	16	20	3450	7590	9.0	128	154	A6/30 kmph	A6/20 mph
8.25-15	LIFTKING HD	16	6.5	TT	239	9.4	855	33.6	14	18	3550	7810	9.2	131	152	A6/30 kmph	A6/20 mph
10.00-20	ROCKPLUS HD	18	7.5	TT	284	11.2	1080	42.5	30	38	6900	15180	10.2	145	175	A6/30 kmph	A6/20 mph
12.00-20	ROCKPLUS HD	20	8.5	TT	320	12.6	1151	45.3	34	43	9250	20350	10.2	145	185	A6/30 kmph	A6/20 mph



APPLICATION
MPT



MULTI PURPOSE TRUCK (MPT) TYRES

- Tyres for multi purpose trucks, designed for use on highways, off-the-road and agriculture applications. Specially engineered tread pattern offers maximum flexibility.
- Good traction in all weather conditions.
- Good on-the-road drive ability and self cleaning properties.



MPT-007



MPT-999



GRIPMAX

SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	PSI		kmph	mph
10.0/75-15.3	MPT-007	10	9.0	TL	259	10.2	775	30.5	356	14.0	2311	91.0	20	26	1500	3300	3.8	55	122	A8/40 kmph	A8/25 mph
	MPT-007	14	9.0	TL	259	10.2	775	30.5	356	14.0	2311	91.0	20	26	1900	4180	5.4	78	130	A8/40 kmph	A8/25 mph
	MPT-007	18	9.0	TL	259	10.2	775	30.5	356	14.0	2311	91.0	20	26	2200	4840	7.0	100	136	A8/40 kmph	A8/25 mph
11.5/80-15.3	MPT-007	10	9.0	TL	292	11.5	869	34.2	381	15.0	2564	101.0	20	26	1900	4180	3.3	49	130	A8/40 kmph	A8/25 mph
	MPT-007	14	9.0	TL	292	11.5	869	34.2	381	15.0	2564	101.0	20	26	2430	5346	4.8	70	139	A8/40 kmph	A8/25 mph
	MPT-007	18	9.0	TL	292	11.5	869	34.2	381	15.0	2564	101.0	20	26	2800	6160	5.9	86	144	A8/40 kmph	A8/25 mph
10.5-18	MPT-007	10	9.0	TL	269	10.6	904	35.6	406	16.0	2692	106.0	21	26	1700	3740	3.75	53	126	A8/40 kmph	A8/25 mph
12.5-18	MPT-007	10	11.0	TL	325	12.8	991	39.0	457	18.0	2946	116.0	23	26	1800	3960	2.9	43	128	A8/40 kmph	A8/25 mph
	MPT-007	12	11.0	TL	325	12.8	991	39.0	457	18.0	2946	116.0	23	26	1950	4290	3.6	51	131	A8/40 kmph	A8/25 mph
18-19.5	MPT-007	16	14.0	TL	460	18.1	1105	43.5	508	20.0	3277	129.0	25	31	4500	9900	6.0	85	160	A8/40 kmph	A8/25 mph
	MPT-007	18	14.0	TL	460	18.1	1105	43.5	508	20.0	3277	129.0	25	31	5150	11330	7.2	102	165	A8/40 kmph	A8/25 mph
10.5-20	MPT-007	10	9.0	TL	269	10.6	955	37.6	457	18.0	2870	113.0	21	26	1800	3960	3.7	54	128	A8/40 kmph	A8/25 mph
12.5-20	MPT-007	10	11.0	TL	325	12.8	1039	40.9	483	19.0	3099	122.0	21	26	1850	4070	2.9	43	129	A8/40 kmph	A8/25 mph
	MPT-007	12	11.0	TL	325	12.8	1039	40.9	483	19.0	3099	122.0	21	26	2000	4400	3.5	51	132	A8/40 kmph	A8/25 mph
14.5-20	MPT-007	10	11.0	TL	361	14.2	1115	43.9	483	19.0	3302	130.0	25	31	2000	4400	2.5	36	132	A8/40 kmph	A8/25 mph
	MPT-007	14	11.0	TL	361	14.2	1115	43.9	483	19.0	3302	130.0	25	31	2430	5346	3.5	51	139	A8/40 kmph	A8/25 mph
	MPT-007	18	11.0	TL	361	14.2	1115	43.9	483	19.0	3302	130.0	25	31	2725	5995	4.5	63	143	A8/40 kmph	A8/25 mph
16.0/70-20	MPT-999	14	13.0	TL	404	15.9	1128	44.4	483	19.0	3353	132.0	23	29	2900	6380	3.5	50	145	A8/40 kmph	A8/25 mph
18-22.5	MPT-999	12	14.0	TL	465	18.3	1189	46.8	533	21.0	3530	139.0	28	35	4440	9768	4.4	64	160	G/90 kmph	G/56 mph
16.0/70-24	GRIPMAX	14	13.0	TL	404	15.9	1184	46.6	356	14.0	3530	139.0	29	36	3550	7810	3.5	50	152	B/50 kmph	B/30 mph



APPLICATION
COMPACTOR



COMPACTOR TYRES

- Speedways compactor tyres are engineered to provide even distribution of ground pressure & to give optimum compaction.
- Tread compound specially formulated to endure high temperatures and minimize loose materials sticky to tyres.



ROAD KING

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	8KPH		16KPH		bar	psi		kmph	mph
									MAX LOAD	MAX LOAD	kg	lbs					
7.50-15	ROADKING	6	6.0	TT	226	8.9	790	31.1	1770	1415	3894	3113	3.8	55	121	A3/15 kmph	A3/9mph
	ROADKING	14	6.0	TT	226	8.9	790	31.1	2860	2300	6292	5060	8.6	125	137	A3/15 kmph	A3/9mph
8.5/90-15K	ROADKING	14	6.0	TL	231	9.1	785	30.9	4060	2200	8932	7150	3.4	50	121	A3/15 kmph	A3/9mph
9.00-20	ROADKING	12	7.0	TT	274	10.8	1016	40.0	4420	3550	9724	7810	6.3	90	152	A3/15 kmph	A3/9mph
	ROADKING	14	7.0	TT	274	10.8	1016	40.0	4820	3850	10604	8481	7.3	104	155	A3/15 kmph	A3/9mph
11.00-20	ROADKING	16	8.0	TT	305	12.0	1082	42.6	5440	4350	11968	9570	7.3	104	159	A3/15 kmph	A3/9mph
	ROADKING	18	8.0	TT	305	12.0	1082	42.6	5900	4730	12980	10406	8.5	120	162	A3/15 kmph	A3/9mph



APPLICATION
GRADER

GRADER TYRES

- Rugged sturdy tyres for drive wheels of off-the-road equipment.
- Tough carcass and special trade compound with weather- & ozone resistant properties to withstand cuts, snags & bruises in the most severe operating conditions.
- An open spaced traction pattern with self-cleaning property provides traction capability, ideally suited for graders.



POWERGRIP G-2



MONSTER

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph
13.00-24	POWERGRIP G-2	12	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	25	31	2725	5995	3.1	44	143	A8/40 kmph	A8/25 mph
	POWERGRIP G-2	16	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	25	31	3250	7150	4.1	58	149	A8/40 kmph	A8/25 mph
	MONSTER	16	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	34	42	3250	7150	4.1	58	149	A8/40 kmph	A8/25 mph
14.00-24	POWERGRIP G-2	12	10.0	TL	375	14.7	1350	53.1	610	24.0	4013	158.0	25	31	3075	6750	2.8	40	147	A8/40 kmph	A8/25 mph
	POWERGRIP G-2	16	10.0	TL	375	14.7	1350	53.1	610	24.0	4013	158.0	25	31	3650	8030	3.8	54	153	A8/40 kmph	A8/25 mph
	MONSTER	16	10.0	TL	375	14.7	1350	53.1	610	24.0	4013	158.0	34	42	3650	8030	3.8	54	153	A8/40 kmph	A8/25 mph
15.5-25	POWERGRIP G-2	16	12.0	TL	386	15.2	1270	50.0	571	22.5	3772	148.5	24	30	6250	13750	2.8	40	153	A8/40 kmph	A8/25 mph
17.5-25	POWERGRIP G-2	16	14.0	TL	444	17.5	1331	52.4	597	23.5	3950	155.5	26	32	7300	16060	2.8	40	153	A8/40 kmph	A8/25 mph

LIGHT TRUCK ***TYRES***





APPLICATION
LIGHT TRUCK



TRUCK & LIGHT TRUCK TYRES



RANGER



HUNTER



STORM



LOAD KING



MILESTONE



MILEAGE MAKER



SAMRAT +



TIGER



SILVER STONE



TOUGH TRACK PLUS



GTSW



LOAD POWER



APPLICATION
LIGHT TRUCK



LIGHT TRUCK TYRES (D.O.T APPROVED)

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	22nds	kg	lbs	bar	psi		kmph	mph
LT205/90D15(7.00-15E)	MILESTONE	10	5.5	TL	206	8.1	770	30.3	8.0	10	1180	2596	4.6	65	114	P/150 kmph	P/94 mph
LT225/90D16(7.50-16E)	MILESTONE	10	6.0	TL	218	8.6	823	32.4	8.0	10	1590	3498	5.6	78	124	P/150 kmph	P/94 mph

TRUCK & LIGHT TRUCK TYRES

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	22nds	kg	lbs	bar	psi		kmph	mph
5.00-10	RANGER	10	3.5	TT	155	6.1	531	20.9	6	8	450	990	3.0	43	80	J/100 kmph	J/60 mph
4.50-12	RANGER	8	3.0	TT	127	5.0	544	21.4	6	8	415	913	4.1	58	77	J/100 kmph	J/60 mph
	RANGER	10	3.0	TT	127	5.0	544	21.4	6	8	475	1045	5.1	73	82	J/100 kmph	J/60 mph
5.00-12	RANGER	10	3.5	TT	142	5.6	564	22.3	7	9	500	1100	4.3	61	84	J/100 kmph	J/60 mph
5.60-14	HUNTER	10	4.0	TT	145	5.7	640	25.2	12	15	580	1276	4.3	61	89	J/100 kmph	J/60 mph
6.00-14	STORM	8	4.5	TT	170	6.7	681	26.8	6	8	683	1502	4.3	61	95	J/100 kmph	J/60 mph
	STORM	10	4.5	TT	170	6.7	681	26.8	6	8	785	1727	5.4	77	103	J/100 kmph	J/60 mph
6.50-14	STORM	8	4.5	TT	180	7.1	704	27.7	6	8	785	1727	4.3	61	103	J/100 kmph	J/60 mph
	STORM	10	4.5	TT	180	7.1	704	27.7	6	8	905	1990	5.4	77	104	J/100 kmph	J/60 mph
6.40-15	MILESTONE	8	4.0	TT	160	6.3	693	27.3	12	15	710	1562	4.2	60	96	J/100 kmph	J/60 mph
	MILESTONE	10	4.0	TT	160	6.3	693	27.3	12	15	825	1815	5.4	77	101	J/100 kmph	J/60 mph
6.70-15	MILESTONE	8	4.5	TT	165	6.5	710	28.0	12	15	825	1815	4.2	60	101	J/100 kmph	J/60 mph
	MILESTONE	10	4.5	TT	165	6.5	710	28.0	12	15	925	2035	5.4	77	105	J/100 kmph	J/60 mph
7.00-15	MILEAGE MAKER	12	5.5	TT	206	8.1	770	30.3	15	19	1180	2596	6.3	89	162	J/100 kmph	J/60 mph
	MILESTONE	12	5.5	TT	206	8.1	770	30.3	15	19	1180	2596	6.3	89	162	J/100 kmph	J/60 mph
	TIGER	12	5.5	TT	206	8.1	770	30.3	15	19	1180	2596	6.3	89	162	J/100 kmph	J/60 mph
7.50-15	MILESTONE	12	6.0	TT	216	8.5	780	30.7	12	15	1370	3015	6.4	91	119	J/100 kmph	J/60 mph
	MILESTONE	14	6.0	TT	216	8.5	780	30.7	12	15	1480	3255	7.1	101	121	J/100 kmph	J/60 mph
6.00-16	SILVERSTONE	10	4.5	TT	174	6.9	752	29.6	10	13	875	1925	5.3	75	103	J/100 kmph	J/60 mph
	TOUGH TRACK PLUS	10	4.0	TT	174	6.9	752	29.6	10	13	875	1925	5.3	75	103	J/100 kmph	J/60 mph
6.50-16	SILVERSTONE	12	4.5	TT	185	7.3	765	30.1	10	13	1080	2375	7.1	101	111	J/100 kmph	J/60 mph
7.00-16	MILESTONE	10	5.5	TT	206	8.1	785	30.9	12	15	1090	2398	5.3	75	103	J/100 kmph	J/60 mph
	MILESTONE	12	5.5	TT	206	8.1	785	30.9	12	15	1215	2675	6.3	89	115	J/100 kmph	J/60 mph
	MILESTONE	14	5.5	TT	206	8.1	785	30.9	12	15	1320	2904	7.0	99	118	J/100 kmph	J/60 mph
7.50-16	MILESTONE	12	6.0	TT	218	8.6	823	32.4	12	15	1400	3080	6.3	89	120	J/100 kmph	J/60 mph
	MILESTONE	14	6.0	TT	218	8.6	823	32.4	12	15	1500	3300	7.0	99	122	J/100 kmph	J/60 mph
	LOAD KING	16	6.0	TT	218	8.6	823	32.4	16	20	1600	3520	7.7	109	124	J/100 kmph	J/60 mph
8.25-16	GTSW	16	6.0	TT	218	8.6	823	32.4	11	14	1600	3520	7.7	109	124	J/100 kmph	J/60 mph
	MILESTONE	14	6.5	TT	231	9.1	841	33.1	12	15	1700	3740	6.4	91	126	J/100 kmph	J/60 mph
9.00-16	LOAD KING	16	6.5	TT	231	9.1	841	33.6	18	23	1850	4070	7.7	109	129	J/100 kmph	J/60 mph
	SAMRAT +	16	6.5	TT	254	10.0	914	36.0	18	23	2120	4664	7.4	105	134	J/100 kmph	J/60 mph
9.00-20	SAMRAT +	18	6.5	TT	254	10.0	914	36.0	18	23	2475	5445	7.4	105	140	J/100 kmph	J/60 mph
	MILESTONE	14	7.0	TT	259	10.2	1025	40.3	13	16	2575	5665	7.7	109	141	J/100 kmph	J/60 mph
10.00-20	LOAD KING	16	7.0	TT	259	10.2	1035	40.7	19	24	2650	5830	8.1	115	142	J/100 kmph	J/60 mph
	MILESTONE	16	7.5	TT	274	10.8	1060	41.7	14	18	3000	6600	8.1	115	146	J/100 kmph	J/60 mph
11.00-20	TIGER	18	7.5	TT	274	10.8	1075	42.3	20	25	3075	6765	8.5	120	147	J/100 kmph	J/60 mph
	MILESTONE	16	8.0	TT	290	11.4	1082	42.6	14	18	3250	7150	8.1	115	149	J/100 kmph	J/60 mph
12.00-24	LOAD POWER	18	8.5	TT	312	12.3	1240	48.8	20	25	4250	9350	8.1	115	158	J/100 kmph	J/60 mph



APPLICATION
ELECTRIC
VEHICLES

ELECTRIC VEHICLE TYRES



ER-007
(TUBETYPE)

3.00-12, 3.75-12, 3.00-14



CITY STAR
(TUBETYPE)

3.00-12, 90/90-12



R-5
(TUBETYPE)

3.00-14



ROAD STAR
(TUBETYPE)

3.00-14



ER-003
(TUBETYPE)

3.75-12



APPLICATION
JEEP



MILITARY JEEP

4x4 TYRES

- Excellent for ON/OFF Road applications and ensures good all-round performance as well as good traction and durability in ON/OFF Road applications.
- Each tyre features bias belted construction for superior strength and impact resistance, these tyres are built to handle the toughest Off-Road conditions on the planet.



SIZE	PATTERN	PLY RATING	RIM WIDTH inch	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED								
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inches	kg	lbs	bar	psi		kmph	mph							
145-12M	ML-999	4	4.0	TT	145	5.7	561	22.1	260	10.2	1646	65.0	13	16	400	880	3.7	45	76	E/70 kmph	E/44 mph							
6.00-16	MILITARY	8	4.5	TT	168	6.6	752	29.6	330	13.0	2184	86.0	11	14	690	1518	4.2	40	95	G/90 kmph	B/56 mph							
7.00-16	MILITARY	8	5.5	TT	196	7.7	785	30.9	366	14.4	2362	93.0	12	15	975	2145	3.8	40	107	G/90 kmph	B/56 mph							
7.50-16	MILITARY	8	6.0	TT	221	8.7	825	32.5	374	14.7	2393	94.2	12	15	1080	2376	4.2	61	111	G/90 kmph	B/56 mph							
7.50-16	MILITARY	12	6.0	TT	221	8.7	825	32.5	374	14.7	2393	94.2	12	15	1250	2750	6.2	89	116	G/90 kmph	B/56 mph							
7.50-16	SANDGRIP	12	6.0	TT	221	8.7	825	32.5	374	14.7	2393	94.2	12	15	1250	2750	6.2	89	116	G/90 kmph	B/56 mph							
7.50-16	GTSW	8	6.0	TT	218	8.6	823	32.4	374	14.7	2393	94.2	11	14	1120	2664	4.2	60	112	G/90 kmph	B/56 mph							
9.00-16	MILITARY	8	6.5	TT	244	9.6	905	35.6	424	16.7	2768	109.0	15	19	1375	3025	3.4	49	119	G/90 kmph	B/56 mph							
9.00-16	MILITARY	14	5.0	TT	244	9.6	905	35.6	424	16.7	2768	109.0	15	19	1650	3630	6.3	89	125	G/90 kmph	B/56 mph							
8.25-20	MILITARY	10	6.0	TT	234	9.2	925	36.4	389	15.3	2483	97.8	14	18	1600	3520	5.3	75	124	G/90 kmph	B/56 mph							
7.50-20	MILITARY	8	6.0	TT	208	8.2	930	36.6	432	17.0	2692	106.0	14	18	1425	3135	5.1	72	121	G/90 kmph	B/56 mph							
7.50-20	MILITARY	14	6.0	TT	208	8.2	930	36.6	432	17.0	2692	106.0	14	18	1775	3905	7.4	105	128	G/90 kmph	B/56 mph							
9.00-20	MILITARY	12	7.5	TT	259	10.2	1034	40.7	483	19.0	3124	123.0	16	20	2060	4532	6.0	85	133	G/90 kmph	B/56 mph							
10.00-20	MILITARY	12	7.5	TT	284	11.2	1080	42.5	508	20.0	3175	125.0	18	22	2180	4790	5.3	75	135	G/90 kmph	B/56 mph							
12.00-20	MILITARY	18	8.5	TT	320	12.6	1138	44.8	524	20.6	3360	132.3	19	24	3250	7150	7.3	105	149	G/90 kmph	B/56 mph							
12.00-24	MILITARY								UNDER DEVELOPEMENT																			



APPLICATION
THREE WHEELER

THREE WHEELER TYRES



RANGER/ KRANTI
(TUBETYPE)

4.50-10

S-401 / LOADING
(TUBETYPE)

4.00-8, 4.50-10

S-101 / R-101
(TUBETYPE)

4.00-8

S-501 / R-501
(TUBETYPE)

4.00-8

S-601
(TUBETYPE)

4.00-8

TWO WHEELER TYRES



B-3
(TUBELESS)

110/90-16



F-3
(TUBELESS)

140/70-17, 150/70-17



R-9
(TUBELESS)

90/100-10, 3.00-17,
2.75-18, 3.00-18



R-8
(TUBELESS / TUBE-TYPE)

3.00-17, 2.75-18, 3.00-18



R-7
(TUBELESS)

3.50-10, 90/100-10, 3.00-17
100/90-17, 2.75-18, 3.00-18
3.25-18, 100/90-18



B-1
(TUBELESS)

90/90-12, 120/80-16, 100/80-17
100/90-17, 130/70-17, 3.00-17
2.75-18, 100/90-18, 120/80-18, 110/90-19



R-5
(TUBELESS / TUBE-TYPE)

3.50-10, 90/100-10
2.50-16, 3.00-17, 100/90-17
2.75-18, 3.00/18, 100/90-18, 3.50-19



R-3
(TUBE-TYPE)

3.25-16, 2.75-18, 3.00-18



KOBRA
(TUBELESS)

3.00-17, 100/90-17, 120/80-17
2.75-18, 3.00-18, 100/90-18



F-1
(TUBELESS)

2.75-17, 80/90-17, 90/90-17, 3.00-17
2.75-18, 90/90-18, 2.25-19



SW-94
(TUBE-TYPE)

3.25-16, 3.50-18, 3.25-19



MF-101
(TUBELESS / TUBE-TYPE)

2.50-16, 2.75.17,
2.75-18, 3.00-18



MF
(TUBE-TYPE)

2.50-17, 2.50-18



LONG LIFE
(TUBE-TYPE)

2.25-16, 2.50-16, 2.25-17
2.50-17, 2.50-18, 2.50-19



SW-555
(TUBE-TYPE)

3.00-17, 3.00-18



SW-101
(TUBE-TYPE)

3.50-8, 3.50-10



SW-601
(TUBE-TYPE)

3.50-10



AVANTI
(TUBE-TYPE)

3.50-10



JZ-101
(TUBE-TYPE)

2.75-10, 3.00-10



CITY STAR
(TUBE-TYPE)

3.00-12, 90/90-12

BUTYL INNER TUBES & FLAPS

TUBES FOR TWO / THREE WHEELER



SIZE	VALVE
3.50-8	A 40 2 45 / V1.08.3
4.00-8	A 40 2 45 / V1.08.3
90/100-10	A 47 2 45 / V1.08.1
2.75-10	A 47 2 45 / V1.08.1
3.00-10	A 47 2 45 / V1.08.1
3.50-10	A 47 2 45 / V1.08.1
4.00-10	A 40 2 45 / V1.08.3
4.50-10	TR-13 / B 35 3 57 / V2.01.1
5.00-10	TR-13 / B 35 3 57 / V2.01.1
3.00-12	A 47 2 45 / V1.08.1
3.75-12	A 47 2 45 / V1.08.1
90/90-12	A 47 2 45 / V1.08.1
2.75-14	A 29 1 45 / V1.09.2 / TR-29
3.00-14	A 29 1 45 / V1.09.2 / TR-29
2.25-16	A 29 1 45 / V1.09.2 / TR-29
2.50-16	A 29 1 45 / V1.09.2 / TR-29
2.75/3.00-16	A 29 1 45 / V1.09.2 / TR-29
3.25-16	A 29 1 45 / V1.09.2 / TR-29
3.50-16	A 29 1 45 / V1.09.2 / TR-29
2.25-17	A 29 1 45 / V1.09.2 / TR-29
2.50-17	A 29 1 45 / V1.09.2 / TR-29

SIZE	VALVE
2.75-17	A 29 1 45 / V1.09.2 / TR-29
3.00-17	A 29 1 45 / V1.09.2 / TR-29
90/90-17	A 29 1 45 / V1.09.2 / TR-29
100/90-17	A 29 1 45 / V1.09.2 / TR-29
120/80-17	A 29 1 45 / V1.09.2 / TR-29
2.50-18	A 29 1 45 / V1.09.2 / TR-29
2.75-18	A 29 1 45 / V1.09.2 / TR-29
3.00-18	A 29 1 45 / V1.09.2 / TR-29
100/90-18	A 29 1 45 / V1.09.2 / TR-29
3.50-18	A 29 1 45 / V1.09.2 / TR-29
4.00-18	V1.09.1 / V1.08.1
4.10-18	V1.09.1 / V1.08.1
4.00/4.50-18	V1.09.1 / V1.08.1
4.75-18	V1.09.1 / V1.08.1
2.50/2.75-19	V1.09.1 / V1.08.1
3.00-19	A 29 1 45 / V1.09.2 / TR-29
3.25-19	A 29 1 45 / V1.09.2 / TR-29
3.50-19	A 29 1 45 / V1.09.2 / TR-29
3.00-21	V1.09.1 / V1.08.1
3.25-21	V1.09.1 / V1.08.1

TUBES FOR AGRICULTURE EQUIPMENTS & OTR VEHICLES



SIZE	VALVE
3.50-6	TR-13 / B 35 3 57 / V2.01.1
3.50-8	TR-13 / B 35 3 57 / V2.01.1
4.00-8	TR-13 / B 35 3 57 / V2.01.1
4.00-10	TR-13 / B 35 3 57 / V2.01.1
4.50-10	TR-13 / B 35 3 57 / V2.01.1
5.00-10	TR-13 / B 35 3 57 / V2.01.1
5.00-12	TR-13 / B 35 3 57 / V2.01.1
6.00-12	TR-13 / B 35 3 57 / V2.01.1
7.00-12	TR-13 / B 35 3 57 / V2.01.1
10.0/80-12	TR-13 / B 35 3 57 / V2.01.1
200/60-14.5	TR-13 / B 35 3 57 / V2.01.1
10.0/75-15.3	TR-13 / B 35 3 57 / V2.01.1
11.5/80-15.3	TR-13 / B 35 3 57 / V2.01.1
4.00-16	TR-15 / B 35 5 57 / V2.01.2
4.50-16	TR-15 / B 35 5 57 / V2.01.2
5.00-16	TR-15 / B 35 5 57 / V2.01.2
5.50-16	TR-15 / B 35 5 57 / V2.01.2
6.00-16	TR-15 / B 35 5 57 / V2.01.2

SIZE	VALVE
6.00-16	TR-15 / B 35 5 57 / V2.01.2
6.50-16	TR-15 / B 35 5 57 / V2.01.2
7.00-16	TR-15 / B 35 5 57 / V2.01.2
7.00-16	TR-218A / B 20 5 63 / V4.01.1
7.50-16	TR-15 / B 35 5 57 / V2.01.2
7.50-16	TR-218A / B 20 5 63 / V4.01.1
8.25-16	TR-15 / B 35 5 57 / V2.01.2
8.25-16	TR-218A / B 20 5 63 / V4.01.1
9.00-16	TR-15 / B 35 5 57 / V2.01.2
9.00-16	TR-218A / B 20 5 63 / V4.01.1
10.00-16	TR-15 / B 35 5 57 / V2.01.2
10.00-16	TR-218A / B 20 5 63 / V4.01.1
10.5-16	TR-15 / B 35 5 57 / V2.01.2
10.5-16	TR-218A / B 20 5 63 / V4.01.1
10.5/65-16	TR-15 / B 35 5 57 / V2.01.2
10.5/65-16	TR-218A / B 20 5 63 / V4.01.1
9.0/70-16	TR-15 / B 35 5 57 / V2.01.2
9.0/70-16	TR-218A / B 20 5 63 / V4.01.1



TUBES FOR AGRICULTURE EQUIPMENTS & OTR VEHICLES

SIZE VALVE

9.0/75-16	TR-15 / B 35 5 57 / V2.01.2
9.0/75-16	TR-218A / B 20 5 63 / V4.01.1
250/80-16	TR-15 / B 35 5 57 / V2.01.2
250/80-16	TR-218A / B 20 5 63 / V4.01.1
280/70-16	TR-15 / B 35 5 57 / V2.01.2
280/70-16	TR-218A / B 20 5 63 / V4.01.1
10-16.5	TR-15 / B 35 5 57 / V2.01.2
10-16.5	TR-218A / B 20 5 63 / V4.01.1
12-16.5	TR-15 / B 35 5 57 / V2.01.2
12-16.5	TR-218A / B 20 5 63 / V4.01.1
6.00-18	TR-15 / B 35 5 57 / V2.01.2
6.00-18	TR-218A / B 20 5 63 / V4.01.1
7.50-18	TR-15 / B 35 5 57 / V2.01.2
7.50-18	TR-218A / B 20 5 63 / V4.01.1
12.5/80-18	TR-15 / B 35 5 57 / V2.01.2
12.5/80-18	TR-218A / B 20 5 63 / V4.01.1
13.0/65-18	TR-15 / B 35 5 57 / V2.01.2
13.0/75-18	V4.01.1 / TR-217A
14.5/80-18	V4.01.1 / TR-217A
4.50-19	TR-15 / B 35 5 57 / V2.01.2
5.00-19	TR-15 / B 35 5 57 / V2.01.2
6.00-19	TR-15 / B 35 5 57 / V2.01.2
7.00-19	TR-15 / B 35 5 57 / V2.01.2
8.00-19	TR-15 / B 35 5 57 / V2.01.2
6.00-20	TR-15 / B 35 5 57 / V2.01.2
6.50-20	TR-15 / B 35 5 57 / V2.01.2
7.00-20	TR-15 / B 35 5 57 / V2.01.2
7.50-20	TR-15 / B 35 5 57 / V2.01.2
8.00/8.3-20	TR-15 / B 35 5 57 / V2.01.2
8.00/8.3-20	TR-218A / B 20 5 63 / V4.01.1
9.50-20	TR-218A / B 20 5 63 / V4.01.1
10.00-20	TR-218A / B 20 5 63 / V4.01.1
8.3-22	TR-218A / B 20 5 63 / V4.01.1
9.5-22	TR-218A / B 20 5 63 / V4.01.1
8.3-24	TR-218A / B 20 5 63 / V4.01.1
9.5-24	TR-218A / B 20 5 63 / V4.01.1
11.2-24	TR-218A / B 20 5 63 / V4.01.1
12.4-24	TR-218A / B 20 5 63 / V4.01.1

SIZE VALVE

13.00-24	TR-218A / B 20 5 63 / V4.01.1
13.00-24	TR-220 / B30 5 63
13.00-24	TR-179A / A G0 5 82
14.00-24	TR-179A / A G0 5 82
14.00-24	TR-218A / B 20 5 63 / V4.01.1
14.00-24	TRJ-1175 / E D4 6 32
14.00-24	TR-220 / B30 5 63
13.6-24	TR-218A / B 20 5 63 / V4.01.1
14.9-24	TR-218A / B 20 5 63 / V4.01.1
15.5/80-24	TR-218A / B 20 5 63 / V4.01.1
16.5/85-24	TR-218A / B 20 5 63 / V4.01.1
14.00-25	TR-218A / B 20 5 63 / V4.01.1
14.00-25	TR-179A / A G0 5 82
14.00-25	TRJ-1175 / E D4 6 32
14.00-25	TR-220 / B30 5 63
13.6/14.9-26	TR-218A / B 20 5 63 / V4.01.1
23.1-26	TR-218A / TR-220A
11.2-28	TR-218A / B 20 5 63 / V4.01.1
12.4-28	TR-218A / B 20 5 63 / V4.01.1
13.6-28	TR-218A / B 20 5 63 / V4.01.1
14.9-28	TR-218A / B 20 5 63 / V4.01.1
16.9-28	TR-218A / B 20 5 63 / V4.01.1
16.9-30	TR-218A / B 20 5 63 / V4.01.1
18.4-30	TR-218A / B 20 5 63 / V4.01.1
8.3-32	TR-218A / B 20 5 63 / V4.01.1
9.5-32	TR-218A / B 20 5 63 / V4.01.1
11.2-36	TR-218A / B 20 5 63 / V4.01.1
12.4-36	TR-218A / B 20 5 63 / V4.01.1
11.2-38	TR-218A / B 20 5 63 / V4.01.1
12.4-38	TR-218A / B 20 5 63 / V4.01.1
13.6-38	TR-218A / B 20 5 63 / V4.01.1
14.00-38	TR-218A / B 20 5 63 / V4.01.1
14.9-38	TR-218A / B 20 5 63 / V4.01.1
15.5-38	TR-218A / B 20 5 63 / V4.01.1
16.9-38	TR-218A / B 20 5 63 / V4.01.1
18.4-38	TR-218A / B 20 5 63 / V4.01.1
20.8-38	TR-218A / B 20 5 63 / V4.01.1



TUBES FOR BUSES, LIGHT & HEAVY TRUCKS

SIZE	VALVE
6.50-15	TR-15 / B 35 5 57 / V2.01.2
6.70-15	TR-15 / B 35 5 57 / V2.01.2
7.00-15	TR-15 / B 35 5 57 / V2.01.2
7.50-15	TR-15 / B 35 5 57 / V2.01.2
8.15-15	TR-15 / B 35 5 57 / V2.01.2
8.25-15	TR-15 / B 35 5 57 / V2.01.2
8.25-15	AB 15 82
6.00-16	TR-15 / B 35 5 57 / V2.01.2
6.50-16	TR-15 / B 35 5 57 / V2.01.2
7.50-16	AB 15 82
8.25-16	TR-77A / A C3 5 82 / V3.09.16
9.00-16	TR-77A / A C3 5 82 / V3.09.16
10.00-16	V3.09.13 / TR-177A
12.00-18	V3.02.8
13.00-18	V3.02.8
6.50-20	TR-78A / A E7 5 82 / V3.09.18
7.50-20	TR-78A / A E7 5 82 / V3.09.18

SIZE	VALVE
8.25-20	TR-175A / A D4 5 82 / V3.09.17
9.00-20	TR-175A / A D4 5 82 / V3.09.17
9.00R-20	TR-175A / A D4 5 82 / V3.09.17
10.00-20	TR-78A / A E7 5 82 / V3.09.18
10.00R-20	TR-78A / A E7 5 82 / V3.09.18
11.00-20	TR-78A / A E7 5 82 / V3.09.18
11.00R-20	TR-78A / A E7 5 82 / V3.09.18
12.00-20	TR-78A / A E7 5 82 / V3.09.18
12.00R-20	TR-78A / A E7 5 82 / V3.09.18
12.00-24	TR-78A / A E7 5 82 / V3.09.18
12.00R-24	TR-78A / A E7 5 82 / V3.09.18
13.00-24	TR-179A
14.00-24	TRJ-1175C
14.00-25	TRJ-1175C
18.00-25	TRJ-1175C

TUBES FOR UTILITY VEHICLES



SIZE	VALVE
145-10	TR-13 / B 35 3 57 / V2.01.1
5.00-10	TR-13 / B 35 3 57 / V2.01.1
4.50-12	TR-13 / B 35 3 57 / V2.01.1
5.00-12	TR-13 / B 35 3 57 / V2.01.1
145/80D-12	TR-13 / B 35 3 57 / V2.01.1
155/80D-12	TR-13 / B 35 3 57 / V2.01.1

SIZE	VALVE
155/80R-12	TR-13 / B 35 3 57 / V2.01.1
165/70R-13	TR-13 / B 35 3 57 / V2.01.1
165/70-13	TR-13 / B 35 3 57 / V2.01.1
165/175/70-14	TR-13 / B 35 3 57 / V2.01.1
195/205R-14	TR-13 / B 35 3 57 / V2.01.1
185R-16	TR-13 / B 35 3 57 / V2.01.1

TUBES FOR LAWN & GARDEN VEHICLES



SIZE	VALVE
2.50/2.80-4	TR-B7
3.00-4	TR-B7
4.00-4	TR-B7
4.10/3.50-5	TR-13
11x4.00-5	TR-13
11x6.00-5	TR-B7
3.50/4.00-6	TR-B7
13x5.00-6	TR-B7

SIZE	VALVE
15x6.00-6	TR-13
3.50-7	TR-13
4.00-7	TR-13
3.00/3.25-8	TR-13
3.50-8	TR-13
145/70-8	TR-13
16x6.50-8	TR-13
18x8.50-8	TR-13



TUBES FOR INDUSTRIAL & LIFT TRUCK TUBES (FORKLIFT)

SIZE	VALVE
4.00-8	TR-B7
4.00-8	JS-2
5.00-8	JS-2
5.00-8	TR-B7
5.00-10	JS-2
5.00-10	TR-13
5.00-10	JS-2
6.50-10	TR-15
6.50-10	JS-2
6.50-10	TR-75A
7.00-12	TR-75A
7.00-12	JS-2
23X5	TR-B7
23X5	JS-2
2.15-15	V3.06.18
2.15-15	JS-2


SIZE	VALVE
7.00-15	TR-78A
7.00-15	JS-2
7.50-15	TR-75A
7.50-15	JS-2
8.15-15	TR-75A
8.15-15	JS-2
8.25-15	TR-15 / B 35 3 57 / V2.01.2
8.25-15	JS-2
250-15	JS-2
250-15	V3.02.18
300-15	TR-78A
300-15	JS-2
9.00-20	V3.04.5 / TR-78A / TR-177A
10.00-20	V3.04.5 / TR-78A / TR-177A
11.00-20	V3.04.5 / TR-78A / TR-177A
12.00-20	V3.04.5 / TR-78A / TR-177A

TUBES FOR PASSENGER CARS



SIZE	VALVE
145-10	TR-13 / B 35 3 57 / V2.01.1
125/135-12	TR-13 / B 35 3 57 / V2.01.1
125/135-12	TR-13 / B 35 3 57 / V2.01.1
145/70R-12	TR-13 / B 35 3 57 / V2.01.1
155/80D-12	TR-13 / B 35 3 57 / V2.01.1
155/80R-12	TR-13 / B 35 3 57 / V2.01.1
135/70R-13	TR-13 / B 35 3 57 / V2.01.1
145/70R-13	B 46 3 57
145/70R-13	TR-13 / B 46 3 57 / V2.01.1
165/65R-13	TR-13 / B 35 3 57 / V2.01.1
175/80R-13	TR-13 / B 35 3 57 / V2.01.1
135/70R-13	TR-13 / B 35 3 57 / V2.01.1
145R/70-13	TR-13 / B 35 3 57 / V2.01.1
155/70R-13	TR-13 / B 35 3 57 / V2.01.1
165/70R-13	TR-13 / B 35 3 57 / V2.01.1
175/70R-13	TR-13 / B 35 3 57 / V2.01.1
6.00/6.50-13	TR-13 / B 35 3 57 / V2.01.1
4.00/4.50-14	TR-13 / B 35 3 57 / V2.01.1
165/175/70R-14	TR-13 / B 35 3 57 / V2.01.1
175/185R-14	TR-13 / B 35 3 57 / V2.01.1
195/205R-14	TR-13 / B 35 3 57 / V2.01.1

SIZE	VALVE
165/175/65R-14	TR-13 / B 35 3 57 / V2.01.1
165/175/70R-14	TR-13 / B 35 3 57 / V2.01.1
185/70R-14	TR-13 / B 35 3 57 / V2.01.1
125-15	TR-13 / B 35 3 57 / V2.01.1
4.00/4.50-15	TR-13 / B 35 3 57 / V2.01.1
5.00-15	TR-13 / B 35 3 57 / V2.01.1
5.90-15	TR-13 / B 35 3 57 / V2.01.1
F78-15	TR-13 / B 35 3 57 / V2.01.1
175/185R-15	TR-13 / B 35 3 57 / V2.01.1
165/175/70R-15	TR-13 / B 35 3 57 / V2.01.1
175/185/70R-15	TR-13 / B 35 3 57 / V2.01.1
175/185/70R-15	TR-13 / B 35 3 57 / V2.01.1
195/205R-15	TR-13 / B 35 3 57 / V2.01.1
215/225/235/70R-15	TR-13 / B 35 3 57 / V2.01.1
235/75R15	TR-13 / B 35 3 57 / V2.01.1
225/70R15	TR-13 / B 35 3 57 / V2.01.1
255/70R15	TR-13 / B 35 3 57 / V2.01.1
175/185R-16	TR-13 / B 35 3 57 / V2.01.1
195/205/215/70R-16	TR-13 / B 35 3 57 / V2.01.1
195/205/215/70R-16	TR-13 / B 35 3 57 / V2.01.1

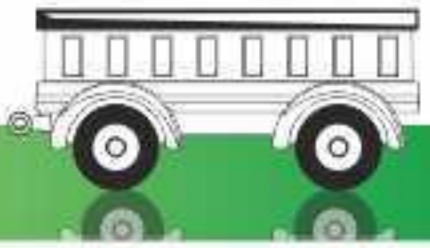

TUBES FOR IMPLEMENT & TRAILERS

SIZE VALVE

6.70-15	TR-15 / B 35 5 57 / V2.01.2
7.60-15	TR-15 / B 35 5 57 / V2.01.2, TR-75A A97 5 82 / V3.09.13 TR
9.5L-15	TR-75 A / A97 5 82 / V3.09.13 TR
11L-15	TR-15 / B 35 5 57 \ V2.01.2, TR-218A / B20 5 63 \ V4.01.1
12.5L-15	TR-15 / B 35 5 57 \ V2.01.2, TR-218A / B20 5 63 \ V4.01.1

SIZE VALVE

10.0/75-15.3	TR-15 / B 35 5 57 \ V2.01.2, TR-218A / B20 5 63 \ V4.01.1
11.5/80-15.3	TR-15 / B 35 5 57 \ V2.01.2, TR-218A / B20 5 63 \ V4.01.1
11L.16	TR-15 / B 35 5 57 / V2.01.2, TR - 75A / A97 5 82 V3.09.13 TR, TR-77A / AC3 5 82 / V3.09.16
12.5L-16	TR-15 / B 35 5 57 / V2.01.2



FLAPS

SIZE

5.00-8
6.00-9
6.50-10
7.00-12
8.25-15
6.00-16
6.50-16
7.00-16
7.50-16
8.25-16
9.00-16

SIZE

7.50-20
8.25-20
9.00-20
10.00-20
11.00-20
12.00-20
12.00-24
13.00-24
14.00-24
14.00-25
17.5-25 / 18.00-25 (Under Development)

Notes



"A customer is the most important visitor on our premises. He is not dependent on us. We are dependent on him. He is not an interruption in our work. He is the purpose of it. He is not an outsider to our business. He is part of it. We are not doing him a favour by serving him. He is doing us a favour by giving us an opportunity to do so."

- Mahatma Gandhi



SPEEDWAYS RUBBER COMPANY

Suchi Pind, By Pass, G.T. Road
Jalandhar-144009
(INDIA)

Phone : +91-181-2421457
24x7 Helpline : +91-98156-50501
Email : sales@speedwaystyres.com
: info@speedwaystyres.com
Website : www.speedwaystyres.com